

Microtek CX4



MICROTEK CX4



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

The stationary Microtek CX4 LCD projector has 2000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. A picture width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. It is no longer offered by the manufacturer Microtek.

3 x 0,9 LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

2000
400:1 full on/off
5,0000 min. Lumen
647 Lux (bei 203 cm Screen)
400:1 full on/off
1.63 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

200W SHP Lamp

2000 h.

Manual

Manual 1,3

-

-

2 x 2W

DVI in
D-sub 15pin in und out
S-Video in
Cinch Video in
USB Typ A
Mini Jack in

-

300W standby 22W

320 x 114 x 260 mm (12,6"x4,5"x10,2") 9,48 L/dm³

40dB

-

Vert.: +/-15°


80%

H-sync: 15-91 kHz

V-sync: 56-85 Hz

60 fL / max. 389 cm screen width

206 cd/m²

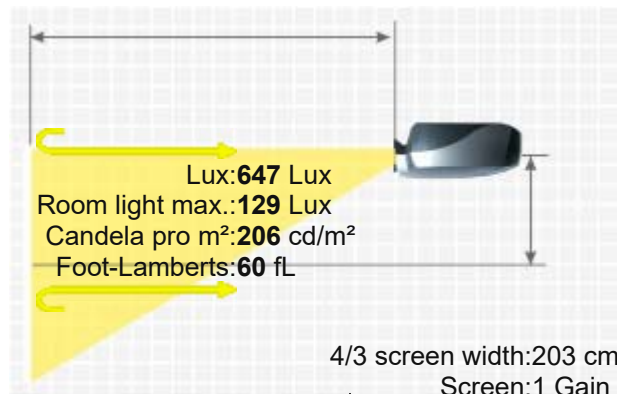

Features
Status
Data

■ Freeze
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/microtekcx4-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.