

Microtek CX7



MICROTEK CX7



Brief Introduction

Beta 2.5

With the CX7, manufacturer Microtek offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 1200:1. The projector will be able to illuminate a 404 cm image width well. However, if room light is available, the picture width should ideally not exceed 269 cm. This model is no longer offered by Microtek.

Display Type



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 2150

Screen 717 Lux (bei 200 cm Screen)

Contrast

1200:1 full on/off

Screen 1200:1 full on/off

Black Level

1,7917 min. Lumen

Screen 0,599 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,

Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

250W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

3W Mono

DVI-I

D-sub 15pin out

Cinch Video in

S-Video in

Mini Jack

USB

RJ45

RS232C

Ceiling Mounting

Yes

Power

340W / 20W standby

Size WxHxD

285 x 85 x 220 mm (11,2"x3,3"x8,7") 5,33 L/dm³

Operating Noise

35dB

Weight

3,08 kg / 6,79 lbs.

Keystone


Vert.: +/-15°

Illumination

80%

Frequenz

H-sync: 15,30-90 kHz

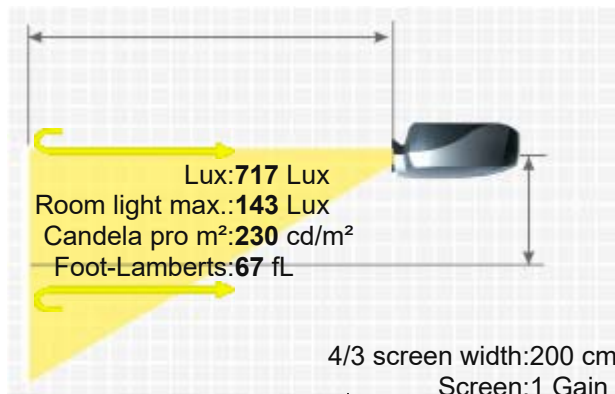

Foot-Lamberts	67 fL / max. 404 cm screen width
	230 cd/m²
Features	■ Lan network compatible.
Status	-
Data	2005 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/microtekcx7-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.