

Microtek MS4



MICROTEK MS4



Brief Introduction

Beta 2.5

The Microtek MS4 model is a DLP projector with SVGA 800 x 600 resolution and a contrast of 1500:1. The projector can illuminate a picture width of up to 302 cm well thanks to its 1200 Ansi lumens. In room light, however, the image width should ideally be less than 201 cm. The model was built by Microtek in 2005 and is no longer current.



1 x 0,55" DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1200

400 Lux (bei 200 cm Screen)

Contrast

1500:1 full on/off

1500:1 full on/off

Black Level

0,8000 min. Lumen

0,267 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W Lamp

Articel Nr.: LMPf14589

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,6

Objective

F=2,44-2,63

Throw Ratio

-

Audio

1W Mono

Connections

DVI

Cinch Video in

S-Video in

Mini Jack

USB

RS232C

Ceiling Mounting

Yes

Power

300W / 20W standby

Size WxHxD

280 x 97 x 205 mm (11"x3,8"x8,1") 5,57 L/dm³

Operating Noise

35dB

Weight

2,04 kg / 4,5 lbs.

Keystone

Vert.: +/-15°

Illumination


80%

Frequenz

H-sync: 15,31-70 kHz

Foot-Lamberts

37 fL / max. 302 cm screen width

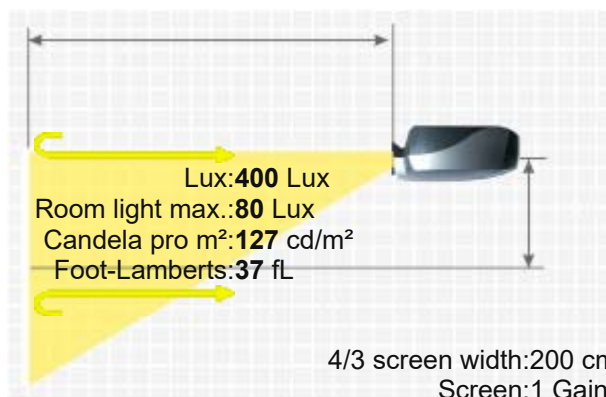

127 cd/m²

Features
Status
Data

-
2005 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/microtekms4-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.