

Microtek MVP800X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

The Microtek model MVP800X is an LCD projector with XGA 1024 x 768 resolution and a contrast of 200:1. The projector will be able to illuminate a 222 cm image width well. However, if room light is available, the image width should ideally not exceed 148 cm. This model is no longer available from Microtek.



3 x 1,3" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

650

200:1 full on/off

3,2500 min. Lumen

Screen

210 Lux (bei 203 cm Screen)

200:1 full on/off

1.066 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

120-W UHP Lamp

1000 h.

-

Manual

Manual 1,3

-

-

2 x 5W

-

-

215W

-

-

-

-

-


-

20 fL / max. 222 cm screen width

69 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

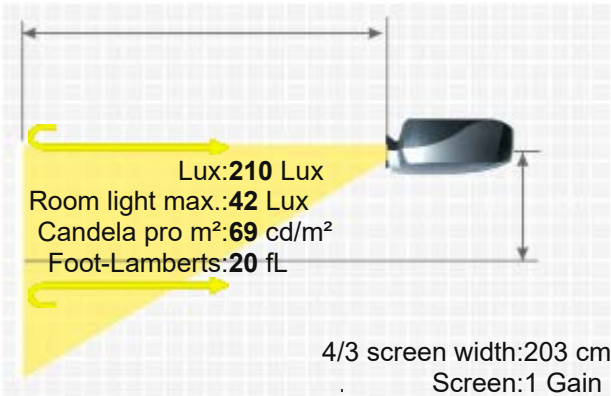

MICROTEK MVP800X



HCinema

<https://www.projector-database.com/pro/microtekmp800x-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.