

Microtek MX3



MICROTEK MX3



Brief Introduction

Beta 2.5

The standard portable MX3 DLP has 1500 Ansi lumens, a contrast of 900:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. It is no longer offered by the manufacturer Microtek.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1500

500 Lux (bei 200 cm Screen)

Contrast

900:1 full on/off

900:1 full on/off

Black Level

1,6667 min. Lumen

0,557 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i, Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W VIP Lamp

Articel Nr.: LMPf9395

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,4-2,6 f=24,0-28,8 mm

Throw Ratio

1,69-2,02:1

Audio

1 x 1W

Connections

DVI

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack

USB Typ A

Ceiling Mounting

Yes

Power

-

Size WxHxD

-

Operating Noise

35dB

Weight

1,60 kg / 3,53 lbs.

Keystone

Vert.: +/-20°

Illumination


85%

Frequenz

H-sync: 15-90 kHz

Foot-Lamberts

46 fL / max. 337 cm screen width

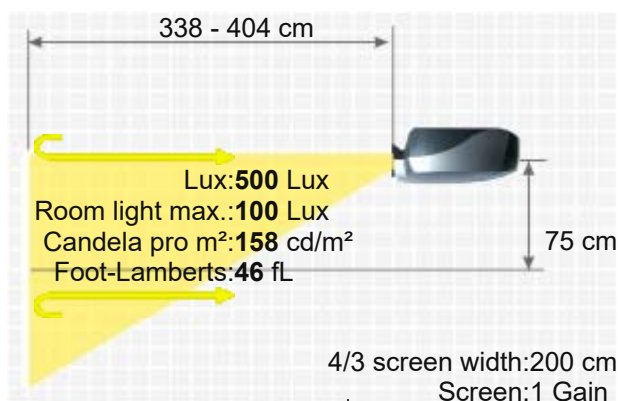

158 cd/m²

Key: 48 cm

Features

- Freeze
- Remote control with mouse control

Status
Data

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/microtekmx3-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.