

Mitsubishi MH2850U

MITSUBISHI MH2850U



A brief introduction to the Mitsubishi MH2850U. The standard portable LCD projector has an SXGA+ 1400 x 1050 resolution and a contrast of 600:1. The horizontal and vertical keystone correction provides leeway when setting up. A picture width of up to 485 cm is possible. However, the picture should be smaller in room light. We recommend max. 323 cm. Even 1080P video signals are no problem for the projector. The model built in 2008 is no longer offered by Mitsubishi.



3 x 0,8" LCD TFT Panel mit MLA

SXGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector
3100
600:1 full on/off
5,1667 min. Lumen

Screen
1033 Lux (bei 200 cm Screen)
600:1 full on/off
1,73 min. Lumen

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

SXGA+ 1400 x 1050

1.470.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

261/ 220W im Eco Mode Lamp

Articel Nr.: VLT-XL650LP

2000 h. 5000 h. in Eco Mode

-

Manual


Manual 1,28

F=1,7-2,9 f=24-29 mm

1,47-1,77:1

3W Mono

DVI-D mit HDCP in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB in

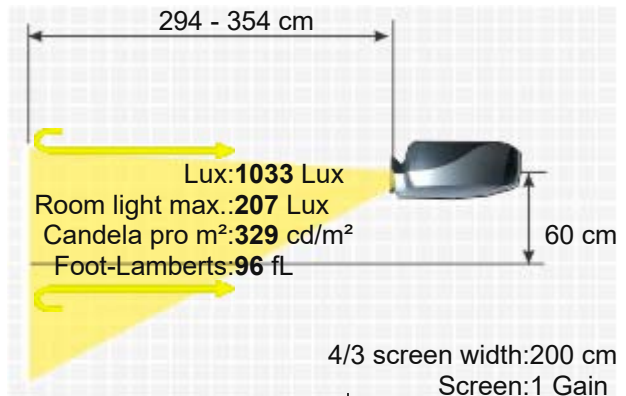

Ceiling Mounting

Power

Size WxHxD

Operating Noise

5V Trigger out

RS232C Din 9pin in

RJ45 in

Yes

-

333 x 113 x 272 mm (13,1"x4,4"x10,7") 10,24 L/dm³

-

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

4,90 kg / 10,8 lbs.

Vert.: +/-35°

Hori.: +/-25°

-

H-sync: 15-100 kHz

V-sync: 50-120 Hz

Range max.: 140 MHz

96 fL / max. 485 cm screen width

329 cd/m²

- Features
- Full HD 1080P compatible

■ Eco Mode

■ Kensington Slot

■ sRGB

■ Gamma correction

■ Password protection

■ Remote control with laser pointer und mouse control

■ PJLink™

■ Control via web browser

■ Optional Wi-Fi network compatible.

■ Lan network compatible.

■

Optional

Bulb only	NLMP16263
Lamp ruby	Ruby-LMP16263
Lamp original	VLT-XL650LP / 915D116O09
Compatible lamp	LMP-K16263
Universal Remote original	Fernb-uni-V3
Remote control original	290P136010
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19159>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Mitsubishi OL-XL2550TZ	3-4.6:1	6-9.2 m	40% Fix		Manual
Mitsubishi OL-XL2550MZ	1.8-2.3:1	3.6-4.6 m	40% Fix		Manual
Mitsubishi OL-XL2550LZ	2-3:1	4-6 m	40% Fix		Manual

Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/mitsubishimh2850u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

