

Mitsubishi SL25U

MITSUBISHI SL25U



The Mitsubishi SL25U model is an LCD projector with SVGA 800 x 600 resolution and a contrast of 500:1. The projector can illuminate a picture width of up to 444 cm thanks to its 2600 Ansi lumens. In room light, however, the image width should ideally be less than 296 cm. The projector is very quiet compared to others with an operating noise of 27 decibels. The projector was launched in 2002 and is no longer sold by the manufacturer.



3 x 0,99" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector

2600
500:1 full on/off
5,2000 min. Lumen

Screen

841 Lux (bei 203 cm Screen)
500:1 full on/off
1.692 min. Lumen

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

NTSC/NTSC 4.43/PAL (inkl. PAL-M, N)/SECAM/PAL-60/DVD (Komponente)/HDTV (525p, 720p, 1.080i)

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

270W SHP Lamp

Articel Nr.: VLT-XL30LP

2000 h.

42,86% / 0,18 €

Manual

Manual 1,24

F=1,7-2,2 f=37-46 mm

1,8-2,3:1

3W Mono

1 x Mini D-Sub 15-polig in 1 x out

5 x BNC RGBHV in


2 x Cinch Video in

1 x BNC Video in

2 x Cinch Stereo in

1 x RS232C, DIN 8-polig

USB Anschluss für Maus

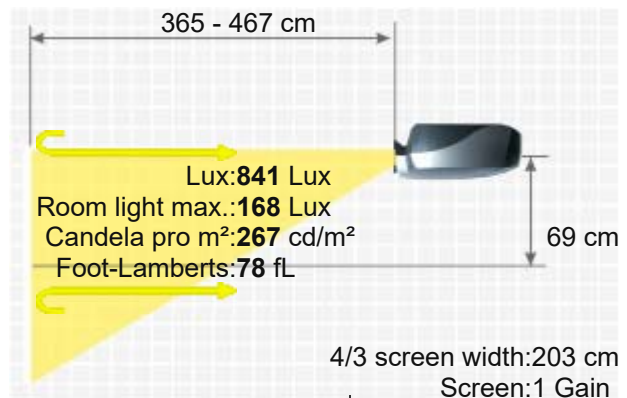

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Mini Jack out

Yes

380W

380 x 157 x 307 mm (15"x6,2"x12,1") 18,32 L/dm³

27dB

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

5,90 kg / 13,01 lbs.

Vert.: +/-30°

-

H-sync: 15-85 kHz
V-sync: 50-120 Hz
Range max.: 140 MHz

78 fL / max. 444 cm screen width
267 cd/m²

Features

■ Freeze

■ User logo

■ Eco Mode

■ Kensington Slot

■ sRGB

■ Gamma correction

■ Picture-in-Picture

■ Remote control with laser pointer

■

Optional

Lamp ruby

Lamp original

Compatible lamp

Universal Remote original

Ruby-LMP2352

VLT-XL1LP

LMP-K2352

Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d2353>

Optional Lenses						
Name	Ratio	Distance	Shift V	Shift H	Zoom	
Zoom Optional Lenses						
Mitsubishi OL-XL30TZ	4.05-5.72:1	8.2-11.6 m	45% Fix		Manual	
Mitsubishi OL-XL30SZ	1.4-1.77:1	2.8-3.6 m	45% Fix		Manual	
Mitsubishi OL-XL30LZ	2.49-3.55:1	5.1-7.2 m	45% Fix		Manual	
Status	2002 Discontinued (EOL) // Last update of the data: 2023-08-04					



More Details

HCinema

<https://www.projector-database.com/pro/mitsubishisl25u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

