

Mitsubishi XD1000U

MITSUBISHI XD1000U



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Mitsubishi model XD1000U is a DLP projector with XGA 1024 x 768 resolution and a contrast of 2000:1. Includes a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. With ambient light, the picture should be max. 318 cm wide. The model built in 2006 is no longer offered by Mitsubishi.



1 x 0,7" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Projector

3000

2000:1 full on/off

1,5000 min. Lumen

Vert.: +50% -9,2% Hori.: +/-9,9% motorisch

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

300W / 240W im Eco Mode Lamp

Articel Nr.: VLT-XD2000LP

2000 h. 5000 h. in Eco Mode

-

Powered

Powered 1,35

F=2,0-2,4 f=24,5-33,1 mm

1,69-2,25:1

3W Mono


DVI-D in
5 x BNC RGBHV in
D-sub 15pin in
YUV über BNC in
Cinch Video in
S-Video in
USB in
Mini Jack in und out

Screen

1000 Lux (bei 200 cm Screen)

2000:1 full on/off

0,501 min. Lumen

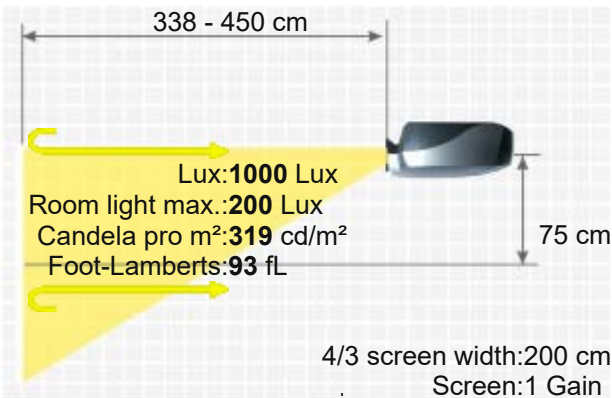

RJ45
RS232C Din 9pin
5V Trigger out



Ceiling Mounting Yes
Power 420W
Size WxHxD 430 x 166 x 425 mm (16,9"x6,5"x16,7") 30,34 L/dm³
Operating Noise 27 dB in Eco Mode

Weight 8,80 kg / 19,4 lbs.
Keystone Vertical und horizontal
Illumination -


Frequenz H-sync: 15-100 kHz
V-sync: 50-85 Hz

Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²

- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Picture-in-Picture
- Password protection
- BrilliantColor™
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- 5-segment colour wheel
- De-interlacer with 3:2 and 2:2 pull down.
- Digital Zoom

Bulb only NLMP4982
Lamp ruby Ruby-LMP4982
Lamp original VLT-XD2000LP / 915D116O06
Optional Compatible lamp LMP-K2403
Universal Remote original Fernb-uni-V3
Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n2403>

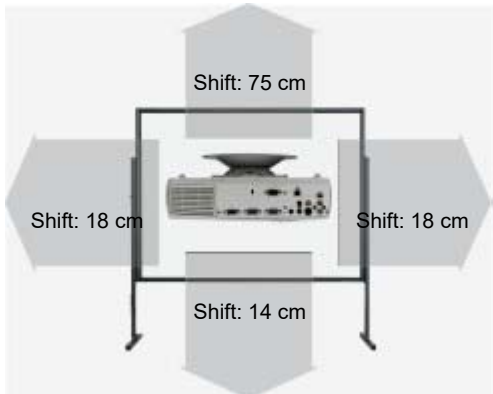

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Mitsubishi OL-XD2000TZ	2.88-4.72:1	5.8-9.4 m	50-9.2%	+/-10%	Powered
Mitsubishi OL-XD2000LZ	2.09-2.86:1	4.2-5.7 m	50-9.2%	+/-10%	Powered
Mitsubishi OL-XD2000SZ	1.35-1.86:1	2.7-3.7 m	50-9.2%	+/-10%	Powered
Fix Optional Lenses					
Mitsubishi OL-XD2000FR	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data





HCinema

<https://www.projector-database.com/pro/mitsubishixd1000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.