



High Brightness at an Affordable Cost

The XD470U is an affordable micro portable native XGA (1024x768) projector. This DLP® projector produces a bright 3000 ANSI lumens image and includes an impressive 2000:1 contrast ratio for extraordinary crisp details. It includes flexible connectivity options for both video and data connectivity and only weighs 6.2 lbs for convenient portability. Additionally, the XD470U includes an instant shut down feature, a filter-free design, and is backed by a 3-years parts and labor warranty and Mitsubishi's exclusive Express Replacement Assistance (ERA) program.

- DLP® Technology
- Native XGA Resolution (1024x768)
- 3000 ANSI Lumens and 2000:1 Contrast Ratio
- Up to 3000 hours lamp life*
- Instant shut down
- RS232C Communication
- Digital Keystone Correction (vertical)
- Anti-theft security hook

* low mode




XD470U

XGA DLP® PROJECTOR




SCREEN				DISTANCE FROM SCREEN (L)				Hd	
Diagonal Size		Width		Height		Max.Zoom		Min.Zoom	
inch	cm	inch	cm	inch	cm	inch	m	inch	cm
40	102	32	81	24	61	50	1.3	60	1.5
60	152	48	122	36	91	76	1.9	91	2.3
80	203	64	163	48	122	101	2.6	121	3.1
100	254	80	203	60	152	126	3.2	151	3.8
150	381	120	305	90	229	189	4.8	227	5.8
200	508	160	406	120	305	252	6.4	302	7.7
250	635	200	508	150	381	315	8.0	378	9.6
300	762	240	610	180	457	378	9.6	-	-

The above numbers are approximate values



Unit measured in millimeters (mm)

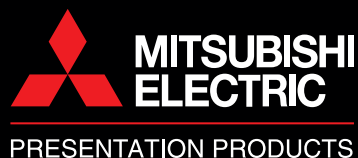

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
Presentation Products Division
 Toll Free: 888.307.0349
 Email: ppdinfo@mdesa.com
www.mitsubishi-presentations.com

Canada
 Mitsubishi Electric Sales Canada Inc.
 Information Technologies Group
 Phone: 905.475.7728
www.mitsubishielectric.ca

DISPLAY TECHNOLOGY	0.55" 1-Chip DMD, 12deg.DDR, DDP2000
RESOLUTION	1024 x 768 (Total 786,432 pixels), 550 Video lines
BRIGHTNESS	3000 ANSI Lumens
CONTRAST RATIO	2000:1
ZOOM/FOCUS	Manual Focus & Zoom Lens (Zoom Ratio 1.2:1)
PROJECTION LENS	F=2.4-2.6, (126"-150" inches@100")
THROW RATIO	1.57-1.87
OFF SET AXIS	7.9:-1
PICTURE SIZE	40 -300 inches
COLOR WHEEL	4 segment (R/G/B/W)
SOURCE LAMP	Normal Mode: 280W (Shut Off Time: 2000hrs), Low Mode:230W (Shut Off Time: 3000hrs)
PC COMPATIBILITY	Resolution: 640 x480 - 1024 x 768 + Compressed 1280 x 1024, Sync on Green available
VIDEO COMPATIBILITY	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video: 480i/p(525i/p), 576i/p(625i/p), 720p(750p), 1080i(1125i 60Hz), 1080i(1125i 50Hz)
INPUT TERMINALS	RGB: Mini D-sub 15pin x 2 Audio: Stereo mini jack (ø 3.5 mm) x 1 (variable) Video: RCA x 1 + S-VIDEO x 1
OUTPUT TERMINAL	RGB: Mini D-sub 15-pin x 1 Audio: Stereo mini jack (ø 3.5 mm) x 1 Video: DC OUT; 5V 1.5A (Max)
COMMUNICATION TERMINAL	USB terminal for Page Up/Down RS232C: D-sub 9pin x 1
SCANNING RATE	[H] 15 - 80 kHz [V] 50 - 85 Hz [Dot clock] max.110 MHz
AUDIO SPEAKER	2 W Mono
HEIGHT ADJUSTER	Front Lifting leg x 1/ Rearward lifting leg x 2
HAND REMOTE UNIT	Full Projector Control, Power Point Page Up/Down via USB
POWER CONSUMPTION	380W / 3.5A
DIMENSION	10.3" x 3.4" x 10.4" inches (261 x 87 x 265mm) (WxHxD excluding height adjustment)
WEIGHT	6.2lbs (2.8kg)
POWER REQUIREMENTS	AC 100-240 V, 50/60Hz
FAN NOISE	39 dBA (Low Mode 36dBA)
SUPPLIED ACCESSORIES	• Soft carrying bag • Remote control (With 2 batteries) • Power cable • VGA(D-sub) cable • Composite cable • User-Manual (CD-ROM) • Safety manual (with Safety Manual and Quick Start Guide) • Lens Cap
WARRANTY	3-Years on Parts and Labor, 3-Years or 10,000-hours on the TI-DLP® DMD Chip, 3-Years Express Replacement Assistance (ERA), 90-Days on lamp
OPTIONAL ACCESSORIES	Replacement Lamp (VLT-XD470LP), Ceiling Mount (PROJ-UCM), Hard Rolling Case (DKT1-ATAC), Soft Rolling Case (DKT1-SRCC)
OUTSTANDING FEATURES	• Quick shutdown • RS232C Communication • Digital Keystone Correction (Vertical) • Anti-Theft Security Hook • Password Lock (menu access only)

©2007 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. All other trademarks are the property of their respective holders.

*The projector lamp contains mercury. Please dispose of properly.

PP6016-5/07-15M-LITXD470U

