

XD530E Wireless projector


crystal clear
display solutions



Our New Standard... Your New Benchmark...
Engineered for Richer Colours and High Brightness

Wireless solution


The XD530E can be accessed wirelessly for easy management and control. In four quick steps the projector can be set up by downloading the required installation files.



Operation screen:1
Confirm the wireless connection.



Operation screen:2
Open the internet browser.



Operation screen:3
Download and install the software.



Operation screen:4
Input the login code and start showing the image wirelessly.

*A wireless LAN connection between the projector and the PC computer is necessary

Functional Performance at its Best

- 3000 ANSI lumens
- 2000:1 contrast ratio
- Filter free design
- Top loading lamp
- DVI connectivity

BrilliantColour™ Technology and Mitsubishi Electric's Engineering Yields Superior Colour Performance

BrilliantColour™ Technology is Texas Instruments' latest innovation for richer colours and better imaging for vibrant displays. At Mitsubishi Electric, we developed a 6-segment colour wheel that includes RGBWYC. Apart from the typical red, green, blue and white, we added yellow and cyan segments to display a wider colour spectrum. In addition, we coded our colour algorithms to emphasize brightness or colour modes, designed to match the environment where the XD530E is used.

Together with selective lamp powered modulation techniques, the XD530E with BrilliantColour™ technology acts intelligently to boost colours to improve the intensity and vibrancy of an entire display. For instance, when projecting an already-bright screen image, the lamp is programmed to provide brighter, more vivid colours. In contrast, if the image shows genuine colour reproduction, the algorithm delivers just the right colours with the appropriate radiance for maximum visual impact.

* BrilliantColour is a trademark of Texas Instruments.

3000 ANSI LUMENS
3000 HOUR LAMP LIFE
2000:1 CONTRAST RATIO




Mobile XGA XD530E wireless projector

NEW



Input and Output Terminals

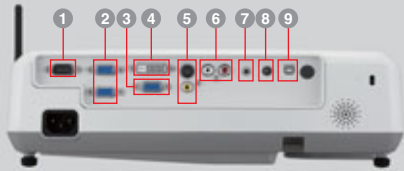

- 1 Serial RS-232C
- 2 PC / Component Video input (mini D-sub 15pin)
- 3 PC / Component Video output
- 4 DVI-D (with HDCP) 5 S-Video / RCA
- 6 Audio input [RCA jack (L/R)]
- 7 Audio input (stereo mini jack) 8 Audio output
- 9 USB terminal for Page Up/Down

Wireless Antenna and RJ45 Terminal



Wireless antenna and RJ45 terminal incorporated into the side of the projector.
*RJ45 terminal is not for control, but used only for sending images from computer.


Specifications

Model	XD530E
Display technology	0.55" 1-Chip DMD
Resolution	1024 x 768 (total 786,432 pixels)
Brightness	3000lm
Contrast	2000:1
Picture Size	40" ~ 300"
Source lamp	230W (Shut Off Time 3000Hrs) with Low Mode, 280W (Shut Off Time 2000Hrs) with Standard Mode
Computer compatibility	640 x 480 ~ 1280 x 1024, True: 1024 x 768, include WXGA, Sync on green available
Input signal system	Video
	NTSC / NTSC4.43 / PAL (including PAL-M, N) / SECAM / PAL-60
Input signal system	PC
	Component Video : 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
Windows 2000 / XP / Vista*	
Input terminals	RGB : mini D-sub15pin x 2, DVI-D (with HDCP) x 1, Video : RCA x 1 + S-video x 1 Audio : stereo mini jack (φ3.5mm) x 1, RCA jack (L/R) x 1
Output terminals	RGB : mini D-sub15pin x 1, Audio : stereo mini jack (φ3.5mm) x 1
Communication terminals	RS-232C (D-sub 9pin) x 1, USB terminal for Page Up/Down x 1
Audio speaker	2W mono
Dimensions(WxHxD)	332 x 102 x 250 mm / 13.1 x 4.0 x 9.8 inch (excluding height adjustment)
Weight	3.4kg / 7.5lbs
Power supply	AC100-240V, 50/60Hz
Optional lamp	VLT-XD520LP

*Operation not guaranteed on Vista.


*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Dimensions

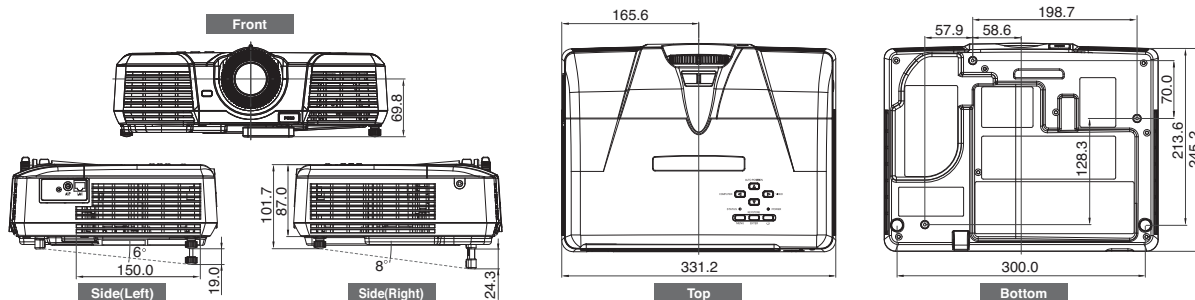

Screen size and Projection distance

As seen from the side

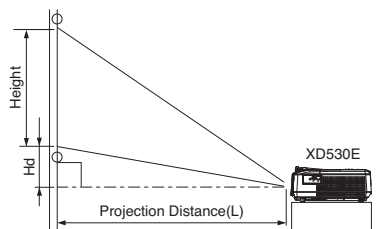

Screen size chart

Screen (4:3 aspect ratio)						Distance from screen (L)						Height projected image (Hd)	
Diagonal size	Width (W)	Height (H)	Shortest	Longest	Height projected image (Hd)	Shortest	Longest	Shortest	Longest	Shortest	Longest	Shortest	Longest
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm
40	102	32	81	24	61	51	1.3	62	1.6	1.8	5	5.2	13
60	152	48	122	36	91	77	2.0	94	2.4	2.7	7	7.9	20
80	203	64	163	48	122	103	2.6	125	3.2	3.6	9	10.5	27
100	254	80	203	60	152	129	3.3	157	4.0	4.5	11	13.1	33
150	381	120	305	90	229	195	4.9	236	6.0	6.8	17	19.6	50
200	508	160	406	120	305	260	6.6	315	8.0	9.0	23	26.2	66
250	635	200	508	150	381	326	8.3	394	10.0	11.3	29	32.7	83
300	762	240	610	180	457	391	9.9	—	—	13.5	34	39.3	100

The above numbers are approximate, and may be slightly different from the actual measurements.

Screen (16:9 aspect ratio)						Distance from screen (L)						Height projected image (Hd)	
Diagonal size	Width (W)	Height (H)	Shortest	Longest	Height projected image (Hd)	Shortest	Longest	Shortest	Longest	Shortest	Longest	Shortest	Longest
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm
40	102	35	89	20	50	56	1.4	68	1.7	5.2	13	5.2	13
60	152	52	133	29	75	84	2.1	102	2.6	7.9	20	7.9	20
80	203	70	177	39	100	113	2.9	137	3.5	10.5	27	10.5	27
100	254	87	221	49	125	141	3.6	171	4.4	13.1	33	13.1	33
150	381	131	332	74	187	213	5.4	258	6.5	19.6	50	19.6	50
200	508	174	443	98	249	284	7.2	344	8.7	26.2	66	26.2	66
250	635	218	553	123	311	356	9.0	430	10.9	32.7	83	32.7	83
300	762	261	664	147	374	427	10.8	—	—	39.3	100	39.3	100

MITSUBISHI ELECTRIC EUROPE

New publication, effective July 2008 Specifications subject to change without notice.