

Nec PA804UL

NEC PA804UL



A brief introduction to the Nec PA804UL. The stationary LCD laser projector has a WUXGA 1920 x 1200 resolution and a contrast of 3000000:1. It is a laser projector with 20000 hours of light life, which is over 13.7 years with a daily viewing of 4 hours. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. Thanks to the brightness of 7500 Ansi lumens, an image width of 880 cm is possible. The projector will also manage slightly brighter rooms with a smaller image width (we recommend max. 587 cm). If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. It is also Full HD 1080P and 3D compatible. Even projection onto the ceiling is possible thanks to the 360° projection. The projector is very quiet compared to others with an operating noise of 30 decibels.

 3 x LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

7500
3000000:1
0,0025 min. Lumen
Vert.: +50% -10% Hori.: +/-20%

WUXGA 1920 x 1200
2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser
20000 h.


0,00 € Laser

Powered

Powered

optional

optional

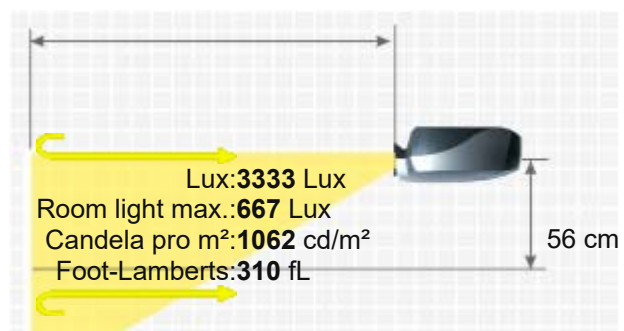

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

- Connections
- 2 x HDMI in
D-sub 15pin in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in
HDBaseT in




- Ceiling Mounting
Power
Size WxHxD
Operating Noise
- Yes
615 / 350W in Eco Mode
599 x 209 x 490 mm (23,6"x8,2"x19,3") 61,34 L/dm³
30 / 28 dB in Eco Mode

- Weight
Keystone
Illumination
- 24,10 kg / 52,91 lbs.
Vert.: +/-40°
Hori.: +/-40°
-

- Frequenz
Foot-Lamberts
- H-sync: 15-100 kHz
V-sync: 15-153 Hz
310 fL / max. 880 cm screen width
1062 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Freeze
 - Eco Mode
 - Kensington Slot
 - High Dynamic Range (HDR)
 - 360° installable
 - Edge Blending
 - PJLink™
 - Control via web browser
 - Lan network compatible.
 - Crestron®-Software compatible.
 - Picture-by-Picture
 - Picture-in-Picture
 - DICOM Simulation

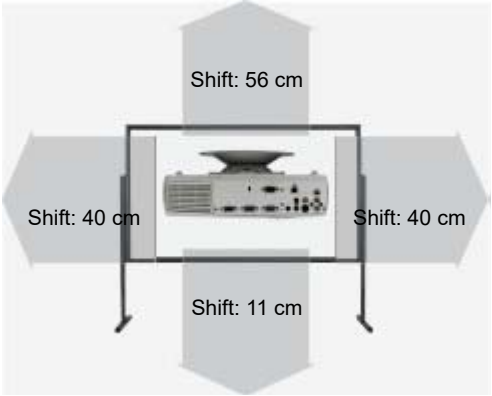

Optionaler Zubehör			
	Objektive Original	NP50ZL / 100015855	4.110,34 €
	Objektiv Original	NP15ZL / 60003219	2.595,74 €
	Objektiv Original	NP14ZL / 60003221	EOL €
	Objektiv Original	NP13ZL / 60003217	492,65 €

	Objektiv Original	NP12ZL / 60003220	1.872,81 €
	Objektiv Original	NP11FL / 60003222	EOL €
	Fernbedienung Original	7N901081 / RD-466E / 7N901321 / RD-480E	30,64 €
	Objektiv Original	100015167 / NP44ML	6.236,76 €
	Objektiv Original	100014645 / NP43ZL	2.193,45 €
	Objektiv Original	100014473 / NP41ZL	1.029,20 €
	Objektiv Original	100014472 / NP40ZL	1.935,74 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP50ZL	0.6-0.75:1	1.2-1.5 m	0.00% Fix		
NP43ZL	2.99-5.93:1	6-11.9 m	50-10%	+/-20%	Powered
NP41ZL	1.3-3.02:1	2.6-6 m	50-10%	+/-20%	Powered
NP40ZL	0.79-1.11:1	1.6-2.2 m			Powered
NP15ZL	4.59-7.02:1	9.2-14 m	50-10%	+/-20%	Manual
NP14ZL	2.9-4.68:1	5.8-9.4 m	50-10%	+/-20%	Manual
NP13ZL	1.46-2.95:1	2.9-5.9 m	50-10%	+/-20%	Manual
NP12ZL	1.16-1.52:1	2.3-3 m	50-10%	+/-20%	Manual
Fix Optional Lenses					
NP44ML-PA4	0.32:1	0.6 m			No Zoom
NP11FL	0.79:1	1.6 m			No Zoom

2021 Current model // Last update of the data: 2025-01-27
Created: 2021-08-04 11:42:05

Status

Data



HCinema

<https://www.projector-database.com/pro/necpa804ul-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.