

Norxe P10 3DS

NORXE P10 3DS



Brief Introduction Beta 2.5

A brief introduction to the P10 3DS: the Norxe 3D LED DLP projector offers 1400 ANSI lumens, a contrast ratio of 1600-10000:1 and a WQXGA 2560 x 1080 resolution. Thanks to the LEDs, the projector has a light lifespan of up to 100,000 hours, which is over 68.5 years of enjoyment at four hours a day. An image width of up to 326 cm is possible. However, the image should be smaller in room light. We recommend a maximum of 217 cm. Furthermore, the projector can play 1080P and 3D without any problems.

Display Type

1 x DLP Panel
WQXGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1400 / with Infitec filter 467 Lux (bei 200 cm Screen)

Contrast

1600-10000:1 1600-10000:1

Black Level

0,1400 min. Lumen 0,292 min. Lumen

Offset

Resolution

WQXGA 2560 x 1080
2.764.800 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

Light Life

SSI,NXL® (+ optional IR LED)
100000 h. to 50%

Operating Costs

0,00 € LED

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein


Connections

2x DisplayPort 1.4
HDMI 2.0 in
2x BNC (sync/trigger) 1x Mini DIN
USB in
RJ45 in

Ceiling Mounting

Yes, is possible.

Power 325W
Size WxHxD 485 x 216,75 x 405 mm (19,1"x8,5"x15,9") 42,43 L/dm³

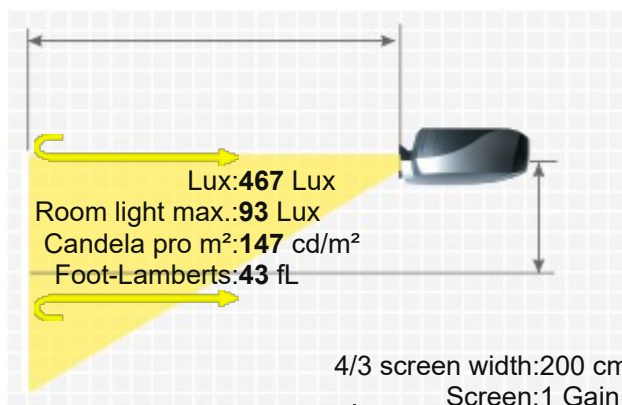

Operating Noise 32dB

Weight 18,50 kg / 39,68 lbs.

Keystone -

Illumination -

Frequenz -

Foot-Lamberts 43 fL / max. 326 cm screen width
147 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Warping
- 24/7 continuous operation capable
- Password protection
- Lan network compatible.
- Unify™ electronics platform
- Unify™ Web
- Unify™ Desktop
- 4K UHD resolution is achieved using an UHD actuator

Screen Mirroring -

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
N4	1.55-2.6:1	3.1-5.2 m	+/-115%	+/-82%	Powered
N2	1.2-1.6:1	2.4-3.2 m	+/-120.5%	+/-85%	Powered
N1	0.8-1.25:1	1.6-2.5 m	+/-68%	+/-57.5%	Powered
Fix Optional Lenses					
N3	0.63:1	1.3 m	+/-95%	+/-71%	No Zoom
Status	2024 Discontinued (EOL) // Last update of the data: 2025-04-07				



More Details



HCinema

<https://www.projector-database.com/pro/norxep103ds-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.