

Norxe P2 3DS

NORXE P2 3DS



A brief introduction to the P2 3DS: The Norxe Stationary 3D LED DLP projector offers 2800 ANSI lumens, a contrast of 1600-4000:1 and a WQXGA 2560 x 1080 resolution. It is an LED projector with a 100,000-hour light lifespan, which is over 68.5 years at four hours a day. The projector is equipped with an integrated media player that will play files directly without any problems. An image width of up to 461 cm is possible. However, the image should be smaller in room light. We recommend a maximum of 307 cm. The model is also Full HD 1080P and 3D compatible.

Brief Introduction Beta 2.5

Display Type



1 x DMD DLP Panel
WQXGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2800

933 Lux (bei 200 cm Screen)

Contrast

1600-4000:1

1600-4000:1

Black Level

1,7500 min. Lumen

0,584 min. Lumen

Offset

Resolution

WQXGA 2560 x 1080
2.764.800 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Media player formats: 17 ms @60Hz/9.5 ms @120Hz
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

SSI,NXL® (+ optional IR LED)

100000 h. to 50%

Operating Costs

0,00 € LED

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

Nein

Connections

2x DisplayPort 1.4
2x DualLink DVI
HDMI 2.0 in
2x BNC (sync/trigger) 1x Mini DIN
USB in
RJ45 in

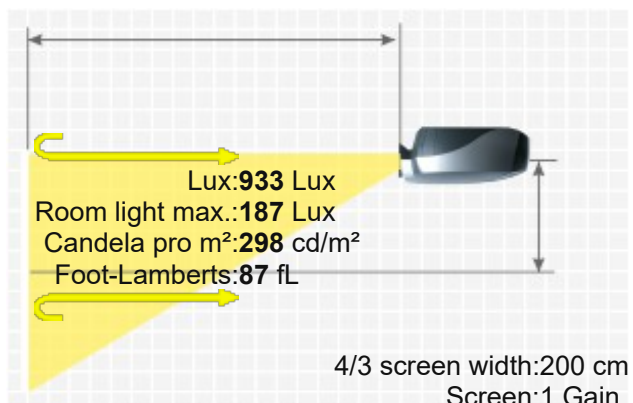

Ceiling Mounting Yes, is possible.
Power 600W typical, 800W max
Size WxHxD 488 x 505 x 241 mm (19,2"x19,9"x9,5") 59,39 L/dm³
Operating Noise 32dB

Weight 22,50 kg / 48,5 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²
■ Real Full HD 3D
■ Full HD 1080P compatible
■ Integrated Mediaplayer
■ Warping
■ 24/7 continuous operation capable

Features ■ Password protection
■ Lan network compatible.
■ Unify™ electronics platform
■ Unify™ Web
■ Unify™ Desktop
■ 4K UHD resolution is achieved using an UHD actuator

Screen Mirroring -

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
N4	1.55-2.6:1	3.1-5.2 m	+/-115%	+/-82%	Powered
N2	1.2-1.6:1	2.4-3.2 m	+/-120.5%	+/-85%	Powered
N1	0.8-1.25:1	1.6-2.5 m	+/-68%	+/-57.5%	Powered
Fix Optional Lenses					
N3	0.63:1	1.3 m	+/-95%	+/-71%	No Zoom

Status 2024 Current model // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/norxep23ds-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.