

Optoma EzPro / EP585

OPTOMA EZPRO / EP585



Brief Introduction

Beta 2.5

Display Type

 1 x 6,4" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

500

Contrast

200:1 full on/off

Black Level

2,5000 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel
XGA 1024 x 768 compressed

Video Modes

VGA, VESA, Mac, PC98, FM Towns

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

330W Metalldampf Lamp
Articel Nr.: BL-FM330A / SP.81003.001

Light Life

1000 h.

Operating Costs

-

Focus

-

Zoom

-

Objective

F=4,9-5,2 f=212-224 mm

Throw Ratio

1,63-1,72:1

Audio

2 x1,5W Stereo

Connections

1 Eingang PC (15 Pin Mini D-sub), 1 Computer Monitor Ausgang (15 Pin Mini D-sub), 1 x Mauseingang (D-SUB 9 Pin), 1 x S-Video in (4 Pin Mini DIN), 1 Eingang für Composite Video (RCA), 2 x Audio Eingang (RCA L/R), 1 x Audio Ausgang (RCA, L/R)

Ceiling Mounting

-

Power

380W standby 20W


Size WxHxD

259 x 162 x 317 mm (10,2"x6,4"x12,5") 13,3 L/dm³

Operating Noise


43dB

Projector 500
Screen 162 Lux (bei 203 cm Screen)
200:1 full on/off
0.823 min. Lumen

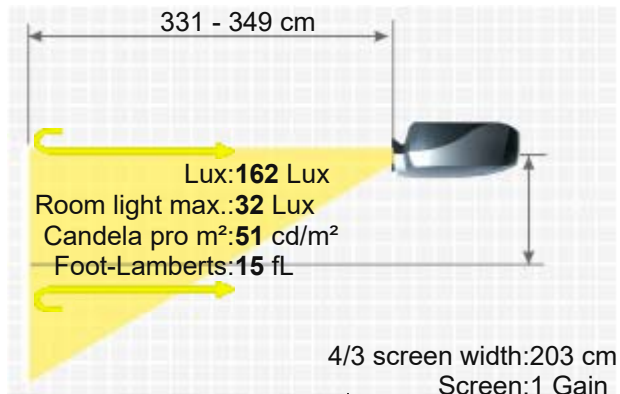

Key: 120 cm

Weight 4,50 kg / 9,92 lbs.
Keystone Vert.: +/-20°
Illumination -
H-sync: 15-60 kHz
Frequenz V-sync: 50-85 Hz
Range max.: 60 MHz
Foot-Lamberts 15 fL / max. 195 cm screen width
51 cd/m²
Features ■ Freeze
■ Remote control with backlight
Status 1999 Discontinued (EOL) // Last update of the data: 2023-08-04

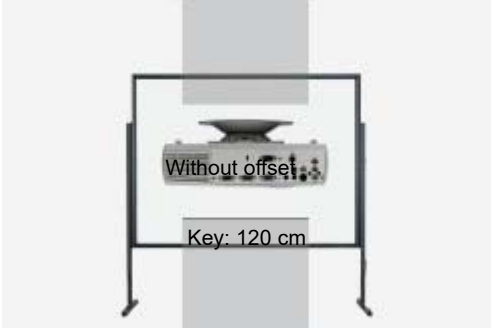

More Details



HCinema

<https://www.projector-database.com/pro/optomaep585-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.