

Optoma ZK750

EAN/UPC:796435 44 377 1

OPTOMA ZK750



The Optoma ZK750 3D laser DLP projector has 7500 Ansi lumens, a contrast of 300000:1 and a 4KESHIFT 2716 x 1528 4,150,048 pixel resolution. Thanks to the laser technology, the projector has a light life of up to 20,000 hours, which is over 13.7 years if enjoyed for four hours a day. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. 7500 Ansi lumens ensure that a picture width of 880 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 587 cm. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model is also compatible with Full HD 1080P and 4K as well as 3D, meaning that all Blu-ray formats currently available can be recognized by the projector. On the market since 2019, the model is no longer offered by the manufacturer Optoma.



1 x 0,67" DLP Chip

4KESH 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

7500

300000:1 full on/off

0,0250 min. Lumen

Vert.: +/-70% Hori.: +/-30%

4KESHIFT 2716 x 1528 4.150.048 Pixel

(4K2K) 3840 x 2160 mit E-Shift

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the

conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Articel Nr.: BR-3074W / SP.72N03GC01

20000 h.

0,00 € Laser

Powered

Powered

3333 Lux (bei 200 cm Screen)

300000:1 full on/off

0,011 min. Lumen



Objective

optional

Throw Ratio

optional

Audio

-

Room light max.:667 Lux
Candela pro m²:1062 cd/m²
Foot-Lamberts:310 fL

16/9 screen width:200 cm
Screen:1 Gain

- Connections
- 2x HDMI 2.0 (HDCP 2.2)

1x HDMI

1x DisplayPort 1.2a

1x HDBaseT

1x 3G-SDI

1x 3G-SDI

1x USB-A

1x RS232C

1x RJ45

1x wired remote in

1x wired remote out

1x 3D sync in

1x 3D sync out

1x 12V trigger



- Ceiling Mounting
- Yes
- Power
- 1040W / 540W in Eco Mode
- Size WxHxD
- 599,9 x 218,9 x 519,9 mm (23,6"x8,6"x20,5") 67,77 L/dm³
- Operating Noise
- 33dB

- Weight
- 33,00 kg / 72,75 lbs.
- Keystone
- Vert.: +/-20°
- Hori.: +/-20°

Illumination

- Frequenz
- H-sync: 15,37-91,1 kHz
- V-sync: 24-120 Hz

- Foot-Lamberts
- 310 fL / max. 880 cm screen width
- 1062 cd/m²

- Real Full HD 3D

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Eco Mode

■ Kensington Slot

■ High Dynamic Range (HDR)

■ Warping

■ 360° installable

■ 24/7 continuous operation capable

■ Edge Blending


■ Password protection

■ Optional Wi-Fi network compatible.

■ Lan network compatible.

Features

- Optional
- Remote control original
- BR-3074W / SP.72N03GC01
- Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002620>

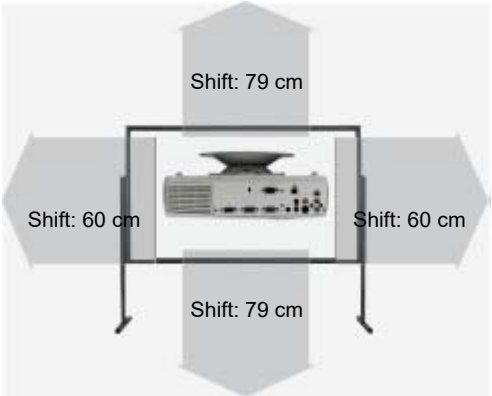

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
BX-CTA26	1.2-1.73:1	2.4-3.5 m	+/-60%	+/-25%	Powered
BX-CTA25	0.85-1.02:1	1.7-2 m	0.00% Fix		Powered

BX-CTA23	5.66-10.18:1	11.3-20.4 m	+/-60%	+/-25%	Powered
BX-CTA22	2.83-5.66:1	5.7-11.3 m	0.00% Fix		Powered
BX-CTA21	2.12-2.83:1	4.2-5.7 m	+/-60%	+/-25%	Powered
BX-CTA20	1.7-2.12:1	3.4-4.2 m	+/-60%	+/-25%	Powered

Status

2019 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2019-07-31 22:11:01



More Details



HCinema

<https://www.projector-database.com/pro/optomazk750-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.