

Panasonic PT D6000E/U/L/S/K

PANASONIC PT D6000E/U/L/S/K



The Panasonic model PT D6000E/U/L/S/K is a DLP projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The integrated lens shift gives freedom when positioning the projector. An image width of up to 702 cm is possible as the projector has 6500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 468 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Playing 1080P is also no problem for the projector, which can even project Blu-rays onto the ceiling thanks to 360° projection. The model built in 2009 is no longer offered by Panasonic, but is still very popular in our projector database.

 1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector	6500	Screen	2167 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	Screen	2000:1 full on/off
Black Level	3,2500 min. Lumen	Screen	1,085 min. Lumen

Lens shift Vert.: +50% -0% Hori.: +/-10%
Resolution XGA 1024 x 768

Video Modes 786.432 Pixel
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source 2 x 300W UHM Lamp
Article Nr.: ET-LAD60
Light Life 2000 h. 3000 h. in Eco Mode

Operating Costs 8,54% / 0,28 €


Focus Powered

Zoom Powered 1,32

Objective F=1,7-2,0 f=25,6-33,8 mm / L optional

Throw Ratio 1,8-2,4:1

Audio -

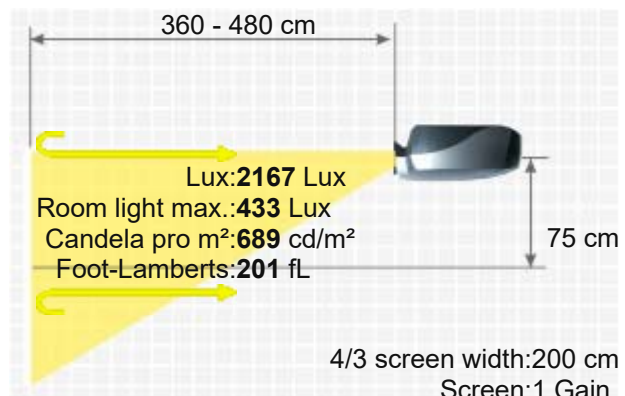

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections	DVI-D in 5 x BNC RGBHV in D-sub 15 pin in BNC Video in S-Video in RS232C Din 9 pin RJ45 in	
Ceiling Mounting	Yes	
Power	800W / 9W standby	
Size WxHxD	498 x 175 x 423 mm (19,6"x6,9"x16,7") 36,86 L/dm³	
Operating Noise	-	
Weight	16,00 kg / 35,27 lbs.	
Keystone	Vert.: +/-30°	
Illumination	-	
Frequenz	H-sync: 15-91 kHz V-sync: 50-85 Hz Range max.: 150 MHz	
Foot-Lamberts	201 fL / max. 702 cm screen width 689 cd/m²	
Features	■ Full HD 1080P compatible ■ Direkt Power Off ■ Lens shift Funktion ■ Freeze ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ 360° installable ■ 24/7 continuous operation capable ■ Edge Blending ■ Password protection ■ PJLink™ ■ Control via web browser ■ Lan network compatible. ■	
Optional	Single lamp ruby	Ruby-LMP25312
	Dual lamp ruby	Ruby-LMP18907
	Single lamp incl. airfilter original	ET-LAD60 / ET-LAD60A
	Twin lamp original	ET-LAD60W / ET-LAD60AW
	Compatible lamp	LMP-K18907
	Compatible lamp	LMP-K18905
	Object lens original	ET-DLE055
	Object lens original	ET-DLE030
	Object lens 2nd hand original	ET-DLE350
	Object lens 2nd hand original	ET-DLE450
	Object lens 2nd hand original	ET-DLE150Z
	Object lens original	ET-DLE250
	Rental Frame original	ET-RFD91
	Object lens original	ET-DLE1STD / TKGF0156
	Object lens original	ET-DLE150
	Air filter compatible	Alternative zu:ET-ACF100
	Remote control original	N2QAYA000063 / N2QAYA000105 / N2QAYA000158
	Air filter original	ET-ACF100
	Ceiling Mount 100-120	Halterung100
	Ceiling Mount 220	Halterung45

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE450	5.5-8.9:1	11-17.8 m	50%	+/-10%	Powered
ET-DLE350	3.7-5.6:1	7.4-11.2 m	50%	+/-10%	Powered
ET-DLE250	2.4-3.7:1	4.8-7.4 m	50%	+/-10%	Powered
ET-DLE1STD / TKGf0156	1.8-2.4:1	3.6-4.8 m	50%	+/-10%	Powered
ET-DLE150	1.3-2:1	2.6-4 m	50%	+/-10%	Powered
Fix Optional Lenses					
ET-DLE055	0.8:1	1.6 m	0.0% Fix		No Zoom
ET-DLE030	0.39:1	0.8 m	0.0% Fix		No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2023-08-04



Data

More Details



HCinema

<https://www.projector-database.com/pro/panasoniccd6000s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.