

Panasonic PT DZ770 K/L/S

PANASONIC PT DZ770 K/L/S



The Panasonic PT DZ770 K/L/S DLP projector has 7000 Ansi lumens, a contrast of 2500:1 and a WUXGA 1920 x 1200 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 850 cm is possible as the projector has 7000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 567 cm. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. It is also Full HD 1080P compatible. The model built in 2012 is no longer offered by Panasonic, but is still very popular in our projector database.

 1 x 0,67" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Projector	7000	Screen	3111 Lux (bei 200 cm Screen)
Contrast	2500:1 full on/off		2500:1 full on/off
Black Level	2,8000 min. Lumen		1,246 min. Lumen

Vert.: +50% -0% Hori.: +/-10%
WUXGA 1920 x 1200

2.304.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 300W UHM Lamp

Articel Nr.: ET-LAD60A

2000 h. 3000 h. in Eco Mode

8,54% / 0,28 €

Powered


Powered 1,33

F=1,7-2,0 f=26,8-35,7 mm / L optional

1,8-2,4:1

-

DVI-D in
5 x BNC RGBHV in
D-sub 15 pin in
BNC Video in

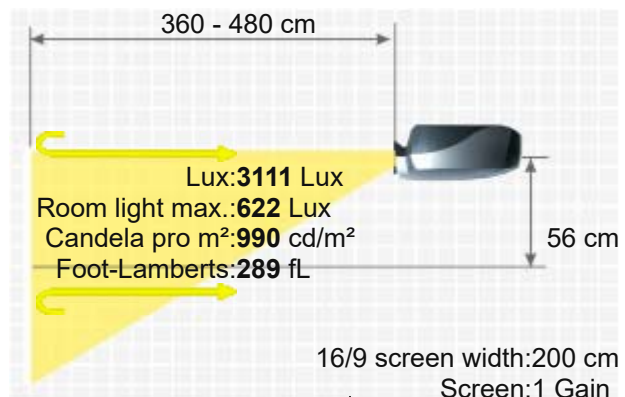

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

S-Video in
RS232C Din 9 pin
HD-SDI in
RJ45 in



Yes
800W / 9W standby
498 x 175 x 466 mm (19,6"x6,9"x18,3") 40,61 L/dm³
39 / 35 dB in Eco Mode

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

16,00 kg / 35,27 lbs.
Vert.: +/-30°
90%
H-sync: 15-91 kHz
V-sync: 50-85 Hz
Range max.: 162 MHz
289 fL / max. 850 cm screen width
990 cd/m²

Frequenz

Foot-Lamberts


- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Warping
- 24/7 continuous operation capable
- Edge Blending
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- Digital Zoom
- Picture-in-picture

Features

Remote control original	N2QAYB000784
Rental Frame original	ET-RFD91
Ceiling bracket original	ET-PKD55S
Twin lamp original	ET-LAD60W / ET-LAD60AW
Single lamp incl. airfilter original	ET-LAD60 / ET-LAD60A
Air filter original	ET-EMF300
Object lens 2nd hand original	ET-DLE450
Object lens 2nd hand original	ET-DLE350
Object lens original	ET-DLE250
Object lens original	ET-DLE1STD / TKGF0156
Object lens 2nd hand original	ET-DLE150Z
Object lens original	ET-DLE150
Object lens original	ET-DLE055
Object lens original	ET-DLE030

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro20987>

Optional

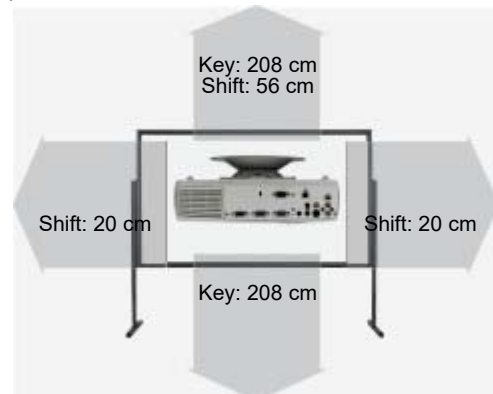


Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE450	5.4-8.6:1	10.8-17.2 m	50%	+/-10%	Powered
ET-DLE350	3.6-5.4:1	7.2-10.8 m	50%	+/-10%	Powered
ET-DLE250	2.3-3.6:1	4.6-7.2 m	50%	+/-10%	Powered

ET-DLE1STD / TKGF0156	1.8-2.4:1	3.6-4.8 m	50%	+/-10%	Powered
ET-DLE150	1.3-1.9:1	2.6-3.8 m	50%	+/-10%	Powered
Fix Optional Lenses					
ET-DLE055	0.8:1	1.6 m	0.0% Fix		No Zoom
ET-DLE030	0.38:1	0.8 m	0.0% Fix		No Zoom
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data

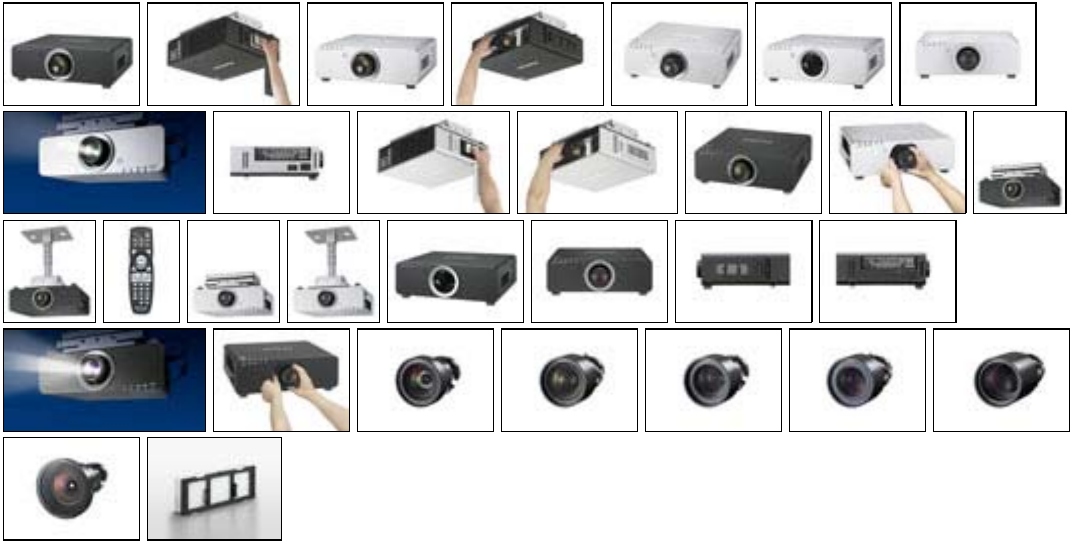

More Details



HCinema

<https://www.projector-database.com/pro/panasonicdz770k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.