

Panasonic PT D12000E/U

PANASONIC PT D12000E/U



With the PT D12000E/U, manufacturer Panasonic offers a large-format DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 5000:1. Including a lens shift and keystone correction function, which provides freedom during installation. The projector can illuminate an image width of up to 954 cm thanks to its 12000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 636 cm is recommended. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. Furthermore, the projector can play 1080P without any problems. Even projection onto the ceiling is possible thanks to the 360° projection. The model built in 2008 is no longer offered by Panasonic.



3 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

12000

5000:1 full on/off

2,4000 min. Lumen

Vert.: +/-50% Hori.: +/-30%

SXGA+ 1400 x 1050

1.470.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

4 x 300W UHM Lamp

Article Nr.: ET-LAD12K ET-LAD12KF

2000 h.

-

Powered

Powered

optional

optional

Nein


DVI-D in
5 x BNC RGBHV in
BNC Video in
2 x RS232C in
1 x RS422 in 1 x out
RJ45 in

4000 Lux (bei 200 cm Screen)

5000:1 full on/off

0,8 min. Lumen

Screen

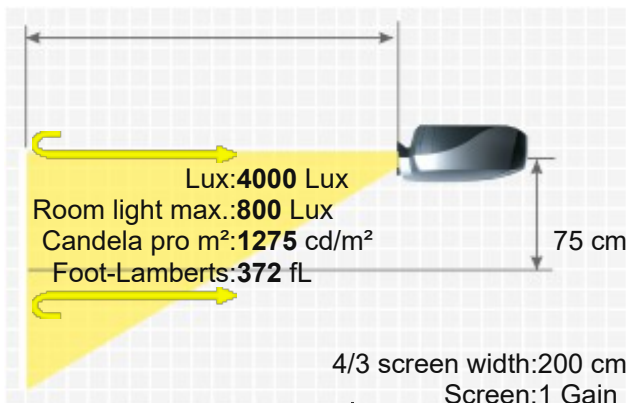

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weitere Anschlüsse optional

Yes, is possible.

1500W / 15W standby

578 x 320 x 643 mm (22,8"x12,6"x25,3") 118,93 L/dm³

-

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

35,00 kg / 77,16 lbs.

Vert.: +/-40°
Hori.: +/-15°

-

H-sync: 15-100 kHz
V-sync: 24-120 Hz

372 fL / max. 954 cm screen width
1275 cd/m²

- Features
- Full HD 1080P compatible

■ Lens shift Funktion

■ sRGB

■ Gamma correction

■ Dynamic iris

■ Warping

■ 360° installable

■ 24/7 continuous operation capable

■ Edge Blending

■ Password protection

■ PJLink™

■ Control via web browser


■ Lan network compatible.

Screen Mirroring

Optional accessories

	4-er Pack Lampe Ruby	Ruby-LMP18583	630,95 €
	Einzel Lampe Ruby	Ruby-LMP18582	14.037,64 €
	4-er Pack Lampe Original	ET-LAD12KF / ET-LAD12000F	EOL €
	Einzel Lampe Original	ET-LAD12K / ET-LAD12000	EOL €
	Objektiv Original	ET-D75LE8	11.301,03 €
	Objektiv Original	ET-D75LE6	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	N2QAYB000076	EOL €
	Luftfilter Original	TKNE067	EOL €
	Rauch-Luftfilter Original	ET-SFD100	EOL €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-D75LE8	8.07-15.12:1	16.1-30.2 m	+/-50%	+/-30%	Powered
ET-D75LE6	1.02-1.22:1	2-2.4 m	+/-40%	+/-20%	Powered
ET-D75LE4	5.07-8.07:1	10.1-16.1 m	+/-50%	+/-30%	Powered
ET-D75LE3	3.04-5.07:1	6.1-10.1 m	+/-50%	+/-30%	Powered
ET-D75LE2	2.03-3.04:1	4.1-6.1 m	+/-50%	+/-30%	Powered

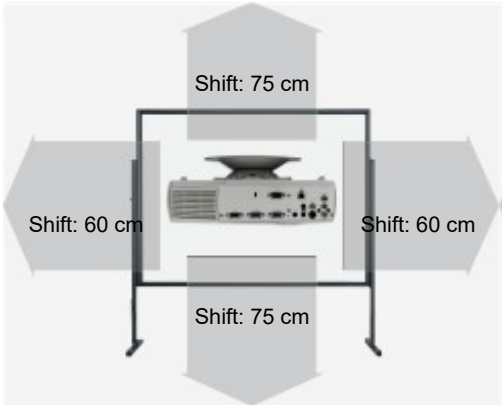

ET-D75LE1

1.51-2.02:1

3-4 m

+/-50%

+/-30%

Powered

Fix Optional Lenses

ET-D75LE5

0.78:1

1.6 m

0.0% Fix

No Zoom

Status

2008 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptd12000u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.