

Panasonic PT D5700E/U/L

PANASONIC PT D5700E/U/L



The stationary PT D5700E/U/L DLP has 6000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The integrated media player allows files to be played directly. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 675 cm is possible as the projector has 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 450 cm is recommended. If the image width is not sufficient, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model built in 2007 is no longer offered by Panasonic.

Brief Introduction

Beta 2.5

Display Type

1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

6000

2000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

3,0000 min. Lumen

1,002 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: BMP, JPEG, PNG

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 300W UHM Lamp

Article Nr.: ET-LAD57 ET-LAD57W

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,32

Objective


F=1,7-2,0 f=25,6-33,8 mm

Throw Ratio

1,8-2,5:1

Audio

Nein

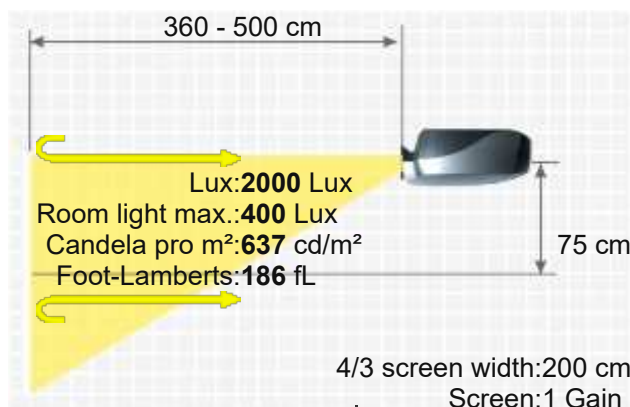

DVI-D mit HDCP
 5 x BNC RGBHV in
 D-sub 15pin in
 S-Video in
 Cinch Video in
 RS232C Din 9pin in und out
 Remote in und out
 RJ45

Connections



Ceiling Mounting

Yes, is possible.

Power

750W / 15W standby

Size WxHxD

530 x 167 x 429 mm (20,9"x6,6"x16,9") 37,97 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

Weight

13,90 kg / 30,64 lbs.

Keystone

Vert.: +/-30°

Illumination

90%

Frequenz

H-sync: 15-91 kHz

V-sync: 50-85 Hz

Range max.: 108 MHz

Foot-Lamberts

186 fL / max. 675 cm screen width


637 cd/m²

- Direkt Power Off
- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- Edge Blending
- Picture-in-Picture
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- De-interlacer with 3:2 pull down.
- 1 and 2 lamp mode
- Digital Zoom 3x
- Built-in test pattern generator

Features

Screen Mirroring

-

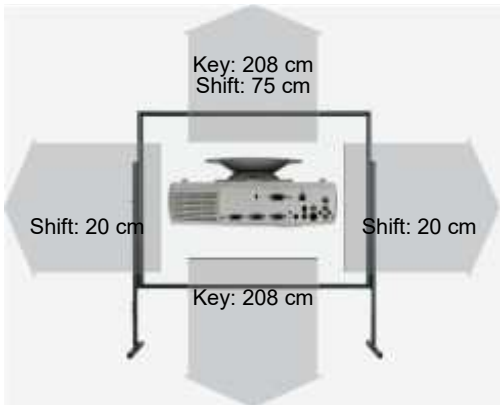

Optional accessories

	Doppel Lampe Ruby	Ruby-LMP17539	497,12 €
	Einzel Lampe Ruby	Ruby-LMP17712	278,98 €
	Doppel Lampe inkl. Luftfilter Original	ET-LAD57W	EOL €
	Einzel Lampe Original	ET-LAD57	EOL €
	Doppel Kompatible Lampe	LMP-K17539	164,87 €
	Einzel Kompatible Lampe	LMP-K17711	85,26 €
	Objektiv Gebraucht Original	ET-DLE200	EOL €
	Objektiv Gebraucht Original	ET-DLE400	1.235,64 €
	Fernbedienung Original	N2QAYB000164 / N2QAYB00371	EOL €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE410	4.56-8.52:1	9.1-17 m	50%	+/-10%	Powered
ET-DLE400	5.79-8.1:1	11.6-16.2 m	50%	+/-10%	Powered
ET-DLE310	3.43-4.48:1	6.9-9 m	50%	+/-10%	Powered
ET-DLE300	3.91-6.06:1	7.8-12.1 m	50%	+/-10%	Powered
ET-DLE200	2.48-4.06:1	5-8.1 m	50%	+/-10%	Powered
ET-DLE100	1.36-1.83:1	2.7-3.7 m	50%	+/-10%	Powered
Fix Optional Lenses					
ET-DLE050	0.82:1	1.6 m	0.0% Fix		No Zoom
Status	2007 Discontinued (EOL) // Last update of the data: 2025-03-03				

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptd5700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.