

Panasonic PT D7500E/U

PANASONIC PT D7500E/U



Brief presentation of the Panasonic PT D7500E/U. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 600:1 / 1000:1 with (SC) lens. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 5000 Ansi lumens, an image width of 616 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 411 cm). In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. It is also Full HD 1080P compatible. It was launched in 2002 and is no longer offered by the manufacturer Panasonic.



3 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector 5000 / 2500 im singel lamp Mode
600:1 full on/off / 1000:1 full on/off
mit (SC)-Objektiv
5,0000 min. Lumen
Vert.: +/-70% Hori.: +40% -28%

Screen 1618 Lux (bei 203 cm Screen)
600:1 full on/off / 1000:1 full on/off mit (SC)-Objektiv
2.705 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

2 x 300W UHM Lamp

Articel Nr.: ET-LAD7500

2000 h. 1500 h. bei Lampe High

-

Powered


Powered

optional

optional

2 x 3W

5 x BNC RGBHV
D-sub 15pin in
S-Video
RS232C und out
BNC Video in und out

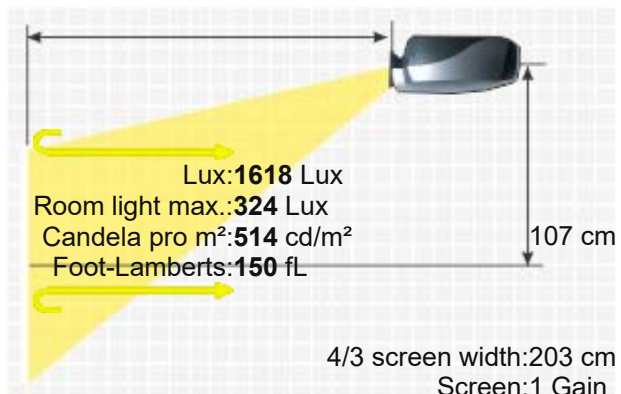

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Mini Jack in und out

Zusatzboard: optional

Yes

800W 12W standby

530 x 200 x 540 mm (20,9"x7,9"x21,3") 57,24 L/dm³

38dB

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

19,80 kg / 43,65 lbs.

-

90%

H-sync: 15-100 kHz
V-sync: 24-120 Hz
Range max.: 162 MHz

150 fL / max. 616 cm screen width
514 cd/m²

- Features
- Full HD 1080P compatible

■ Lens shift Funktion

■ Freeze

■ Eco Mode

■ Kensington Slot

■ sRGB

■ Gamma correction

■ Edge Blending

■ Picture-in-Picture

■ Password protection

■ Remote control with laser pointer

■ 1 and 2 lamp mode


■ Digital Zoom

■ Built-in multiscreen processor

	Single bulb only	NLMP2672
	Single lamp ruby	Ruby-LMP2672
	Dual lamp ruby	Ruby-LMP2673
	Twin lamp incl. air filter original	ET-LAD7500W
	Single lamp original	ET-LAD7500
Optional	Compatible lamp	LMP-K2673
	Compatible lamp	LMP-K20091
	Remote control original	N2QAGB000024
	Air filter original	Filter-2673
	Ceiling Mount 220	Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20091>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Panasonic ET-D75LE3	4.05-6.68:1	8.2-13.6 m	+/-70%	40-28%	Powered
Panasonic ET-D75LE2	2.68-4.01:1	5.4-8.1 m	+/-70%	40-28%	Powered
Panasonic ET-D75LE1	1.99-2.65:1	4-5.4 m	+/-70%	40-28%	Powered
Panasonic ET-D75LE4	6.69-10.89:1	13.6-22.1 m	+/-70%	40-28%	Powered
Fix Optional Lenses					
Panasonic ET-D75LE5	1:1	2 m	0.0% Fix		No Zoom
Status	2002 Discontinued (EOL) // Last update of the data: 2023-08-04				

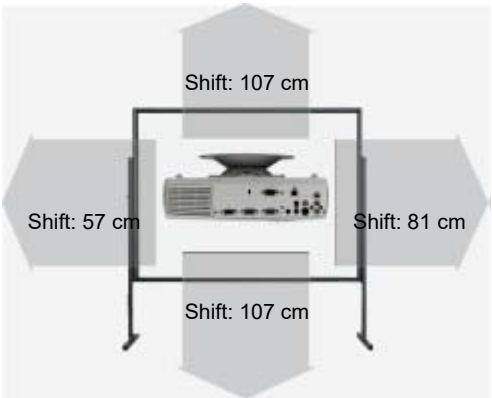



HCinema

<https://www.projector-database.com/pro/panasonicptd7500e-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.