

Panasonic PT D7700E/U/-K

PANASONIC PT D7700E/U/-K



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

The stationary PT D7700E/U/-K DLP has 7000 Ansi lumens, a contrast of 4000:1 and an SXGA+ 1400 x 1050 resolution. The integrated media player allows files to be played directly. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. Thanks to the brightness of 7000 Ansi lumens, an image width of 729 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 486 cm). If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It is also Full HD 1080P compatible. The model was built by Panasonic in 2004 and is no longer current.



3 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Projector 7000 / 3500 im singel lamp Mode
screen 2265 Lux (bei 203 cm Screen)
4000:1 full on/off
0.567 min. Lumen

Vert.: +/-50% Hori.: +/-30% motorisch

SXGA+ 1400 x 1050

1.470.000 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: BMP, JPEG, PNG

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 300W UHM Lamp

Articel Nr.: ET-LAD7700

1000 h.

-


Powered

Powered

optionaloptional

optional

Nein

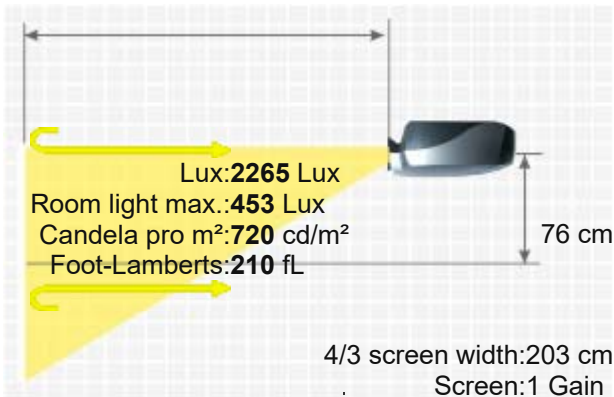

5 x BNC RGBHV
D-sub HD 15-pin
S-Video
RS232C und out
BNC Video in und out
Mini Jack in und out
Zusatzboard: optional



Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Ja
800W
530 x 200 x 569 mm (20,9"x7,9"x22,4") 60,31 L/dm³
35dB

Weight
Keystone
Illumination

22,00 kg / 48,5 lbs.
Vert.: +/-40°
90%

Frequenz

H-sync: 15-100 kHz
V-sync: 24-120 Hz

Foot-Lamberts


210 fL / max. 729 cm screen width
720 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion motorisch
- Integrated Mediaplayer
- Freeze
- Kensington Slot
- sRGB
- Gamma correction
- Dynamic iris
- Edge Blending
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- Model D7700E-K in anthracite housing.
- Proprietary DE-interlacer
- 1 and 2 lamp mode
- Digital zoom 3x
- Built-in test pattern generator

Features

Single bulb only	NLMP17541
Economy lamp ruby	Ruby-LMP15590
Single lamp ruby	Ruby-LMP17541
Dual lamp ruby	Ruby-LMP2690
Dual economy lampe ruby	Ruby-LMP2676
Twin Economy Lamp original	ET-LAD7700LW
Twin lamp incl. air filter original	ET-LAD7700W
Economy Lamp original	ET-LAD7700L
Single lamp original	ET-LAD7700
Object lens original	ET-D75LE6
Object lens original	ET-D75LE8
Remote control original	N2QAGB000024

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n17541>

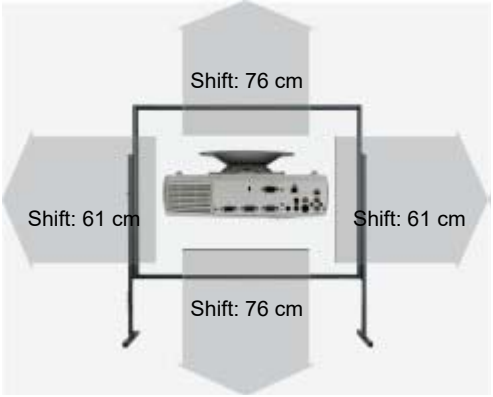

Optional

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-D75LE8	8.07-15.12:1	16.4-30.7 m	+/-50%	+/-30%	Powered
ET-D75LE6	1.02-1.22:1	2.1-2.5 m	+/-40%	+/-20%	Powered

Panasonic ET-D75LE5	0.74-8.07:1	1.5-16.4 m	0.0% Fix	No Zoom	
Panasonic ET-D75LE4	5.02-8.02:1	10.2-16.3 m	+/-50%	+/-30%	Powered
Panasonic ET-D75LE3	3.04-5.07:1	6.2-10.3 m	+/-50%	+/-30%	Powered
Panasonic ET-D75LE2	2.03-3.04:1	4.1-6.2 m	+/-50%	+/-30%	Powered
Panasonic ET-D75LE1	1.51-2.02:1	3.1-4.1 m	+/-50%	+/-30%	Powered

Status2004 Discontinued (EOL) // Last update of the data: 2023-10-26

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptd7700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.