

Panasonic PT DW5100E/U/L

PANASONIC PT DW5100E/U/L



A brief introduction to the Panasonic PT DW5100E/U/L. The stationary DLP projector has a WXGA 1280 x 768 resolution and a contrast of 2000:1. Includes a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 753 cm is possible as the projector has 5500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 502 cm. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. This model is no longer offered by Panasonic.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DLP Chip
WXGA 15/9 Ti Digital Light Processing Chip

Ansi-Lumen

5500

2292 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

2,7500 min. Lumen

1,147 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

WXGA 1280 x 768

983.040 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 300W UHM Lamp

Article Nr.: ET-LAD57 ET-LAD57W

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,32

Objective


F=1,7-2,0 f=25,6-33,8 mm / L optional

Throw Ratio

1,82-2,40:1

Audio

Nein

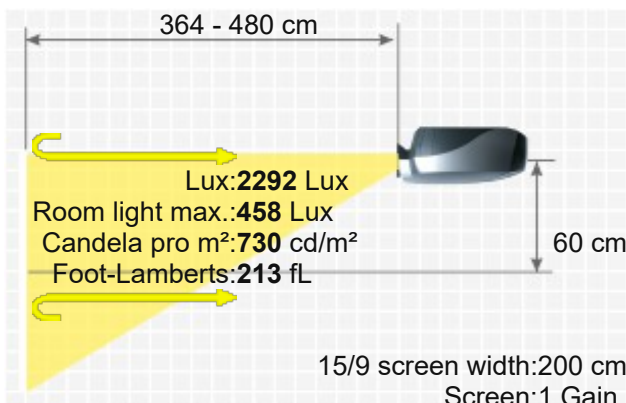

DVI-D mit HDCP
 5 x BNC RGBHV in
 D-sub 15pin in
 S-video in
 Cinch Video in
 RJ45
 RS232C
 Fernbedienung in und out



Ceiling Mounting
 Power
 750W

Size WxHxD
 530 x 167 x 429 mm (20,9"x6,6"x16,9") 37,97 L/dm³

Operating Noise
 35 / 29 dB in Eco Mode

Weight
 13,90 kg / 30,64 lbs.

Keystone
 Vert.: +/-30°

Illumination
 90%

Frequenz
 H-sync: 15-91 kHz

V-sync: 50-85 Hz


Range max.: 150 MHz

Foot-Lamberts
 213 fL / max. 753 cm screen width

730 cd/m²

- Direkt Power Off
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- Edge Blending
- Picture-in-Picture
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- De-interlacer with 3:2 pull down.
- 1 and 2 lamp mode
- Digital Zoom 3x
- Built-in test pattern generator

Screen Mirroring
 -

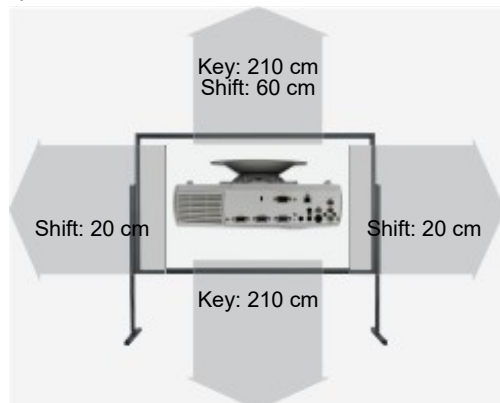

Optional accessories



Einzel Lampe Ruby

Ruby-LMP17712

278,98 €



Doppel Lampe Ruby

Ruby-LMP17539

497,12 €



Einzel Lampe Original

ET-LAD57

EOL €



Doppel Lampe inkl. Luftfilter Original

ET-LAD57W

EOL €



Einzel Kompatible Lampe

LMP-K17711

85,26 €



Doppel Kompatible Lampe

LMP-K17539

164,87 €



Objektiv Gebraucht Original

ET-DLE200

EOL €



Fernbedienung Original

N2QAYB000164

EOL €



Deckenhalterung 220

Halterung45

83,60 €

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
ET-DLE410	4.79-8.96:1	9.6-17.9 m	50%	+/-10%	Powered
ET-DLE310	3.61-4.71:1	7.2-9.4 m	50%	+/-10%	Powered
ET-DLE200	2.51-4.11:1	5-8.2 m	50%	+/-10%	Powered
ET-DLE100	1.38-1.86:1	2.8-3.7 m	50%	+/-10%	Powered
Fix Optional Lenses					
ET-DLE050	0.83:1	1.7 m	0.0% Fix		No Zoom
Status	2007 Discontinued (EOL) // Last update of the data: 2025-03-03				

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptdw5100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.