

Panasonic PT EW640 /L

PANASONIC PT EW640 /L



The PT EW640 /L LCD has 5800 Ansi lumens, a contrast of 5000:1 and a WXGA 1280 x 800 resolution. The manufacturer Panasonic specifies a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours a day. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a picture width of 774 cm well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 516 cm here. It is also Full HD 1080P compatible. This model is no longer offered by Panasonic.

Brief Introduction

Beta 2.5

Display Type



3 x 0,76" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Ansi-Lumen

5800

2320 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

5000:1 full on/off

Black Level

1,1600 min. Lumen

0,464 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-10%

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationär | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

335W UHM Lamp
Articel Nr.: ET-LAE300

Light Life

4000 h. 4500 h. in Eco Mode

Operating Costs

3,05% / 0,1 €

Focus

Powered

Zoom

Powered 1,69

Objective

F=1,7-2,3 f=26,9-45,4 mm / L optional

Throw Ratio

1,7-2,8:1

Audio

10W

Connections

HDMI in
DVI-D mit HDCP in
D-sub 15pin in
5 x BNC RGBHV in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 mit HDBaseT in

Ceiling Mounting

Yes

Power

575W

Size WxHxD

530 x 177 x 445 mm (20,9"x7"x17,5") 41,75 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

Weight

10,60 kg / 23,37 lbs.


Keystone

Vert.: +/-40°

Hori.: +/-30°

Illumination

90%

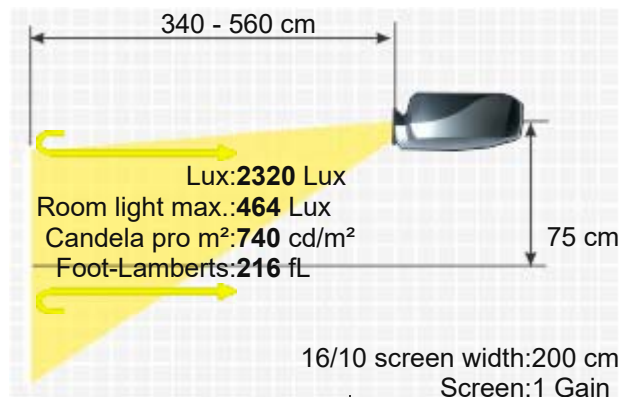

Frequenz
 H-sync: 15-91 kHz
 V-sync: 24-120 Hz
 Range max.: 162 MHz
 Foot-Lamberts
 216 fL / max. 774 cm screen width
 740 cd/m²

- Features
- Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Eco Mode
 - Dynamic iris
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 - Picture-in-picture
 - DICOM simulation

Optional

Remote control original	N2QAYA000063 / N2QAYA000105 / N2QAYA000158
Air filter original	ET-RFE300
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Lamp original	ET-LAE300
Object lens original	ET-ELW21 / LNS-W21
Object lens original	ET-ELW20 / LNS-W20
Object lens original	ET-ELT21 / LNS-T21
Object lens original	ET-ELT20 / LNS-T20

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22665>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-ELW21	0.78-0.98:1	1.6-2 m			
ET-ELW20	1.3-1.7:1	2.6-3.4 m	+/-60%	+/-10%	Powered
ET-ELT21	4.6-7.2:1	9.2-14.4 m	+/-60%	+/-10%	Powered
ET-ELT20	2.8-4.6:1	5.6-9.2 m	+/-60%	+/-10%	Powered
Fix Optional Lenses					
ET-ELW21	0.8:1	1.6 m	0.0% Fix		No Zoom

Status
 2014 Discontinued (EOL) // Last update of the data: 2023-08-04
 Data
 Created: 2014-02-05 16:43:06

More Details




<https://www.projector-database.com/pro/panasonicptew640l-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

