

Panasonic PT-EX500E/U/L

PANASONIC PT-EX500E/U/L



With the PT-EX500E/U/L, manufacturer Panasonic offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 616 cm is possible as the projector has 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 411 cm is recommended. Furthermore, the projector can play 1080P without any problems. Even projection onto the ceiling is possible thanks to the 360° projection. On the market since 2012, the model is no longer offered by the manufacturer Panasonic.



3 x 0,80" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

5000
2000:1 full on/off
2,5000 min. Lumen
Vert.: +/-50% Hori.: +/-10%

Screen

1667 Lux (bei 200 cm Screen)
2000:1 full on/off
0,835 min. Lumen

XGA 1024 x 768
786.432 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

330W UHM Lamp

Articel Nr.: ET-LAE200

3000 h. 4000 h. in Eco Mode

-

Powered


Powered 1,65

F=1,7-2,3 f=26,9-45,4 mm / L optional

1,7-2,8:1

10W Mono

HDMI in
DVI-D in
D-sub 15 pin in
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in

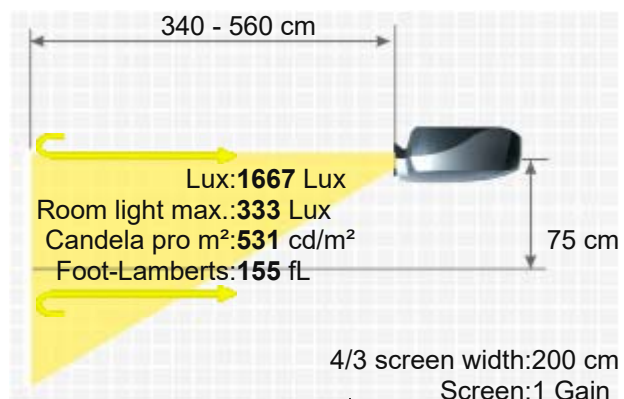

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Cinch Stereo in und out

RJ45 in

RS232C Din 9 pin in

Yes

423W

489,5 x 164 x 434,80 mm (19,3"x6,5"x17,1") 34,81 L/dm³

35 / 31 dB in Eco Mode

Ceiling Mounting

Power

Size WxHxD

Operating Noise

10,50 kg / 23,15 lbs.

Vert.: +/-40°

-

H-sync: 26-80 kHz

V-sync: 23-85 Hz

Range max.: 162 MHz

155 fL / max. 616 cm screen width

531 cd/m²

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

- Full HD 1080P compatible

Direkt Power Off

Lens shift Funktion

Freeze

User logo

Eco Mode

Kensington Slot

Dynamic iris

Warping

360° installable

Picture-in-Picture

Password protection

PJLink™

Control via web browser

Lan network compatible.

Crestron®-Software compatible.

Picture-by-picture

Digital zoom

Auto iris

E-mail error message
- Features

Air filter original	ET-RFE200
Lamp original	ET-LAE200
Object lens original	ET-ELW21 / LNS-W21
Object lens original	ET-ELW20 / LNS-W20
Object lens original	ET-ELT21 / LNS-T21
Object lens original	ET-ELT20 / LNS-T20
Object lens original	ET-ELS20 / LNS-S20
Remote control original	6451055552


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi20977>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-ELW20	1.25-1.7:1	2.5-3.4 m	+/-50%	+/-10%	Powered
ET-ELT21	4.6-7.2:1	9.2-14.4 m	+/-50%	+/-10%	Powered
ET-ELT20	2.89-4.6:1	5.8-9.2 m	+/-50%	+/-10%	Powered
ET-ELS20	1.7-2.89:1	3.4-5.8 m	+/-50%	+/-10%	Powered
Fix Optional Lenses					
ET-ELW21	0.8:1	1.6 m	0.0% Fix		No Zoom

Status

2012 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

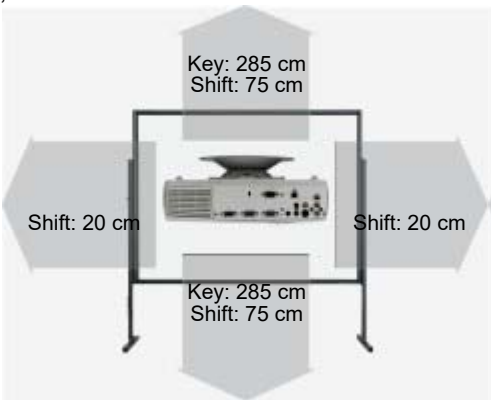



HCinema

<https://www.projector-database.com/pro/panasonicptex500l-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.