

Panasonic PT-MZ882 B/W

PANASONIC PT-MZ882 B/W



A brief introduction to the PT-MZ882: The Panasonic stationary 3D laser LCD projector offers 8200 Ansi lumens, a contrast of 3000000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer Panasonic specifies a service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. The projector can illuminate images up to 920 cm wide thanks to its 8200 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 613 cm. Furthermore, the projector can play 1080P and 3D without any problems, and even has the option of projecting HD 1080P Blu-rays onto the ceiling thanks to 360° projection.

3 x 0,76" LCD Panel
WUXGA 16/9 Liquid Crystal Display

8200
3000000:1 full on/off
0,0027 min. Lumen
Vert.: +/-67% Hori.: +/-35%

3644 Lux (bei 200 cm Screen)
3000000:1 full on/off
0,001 min. Lumen

WUXGA 1920 x 1200
2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h. / 24000 h. in Eco Mode

0,00 € Laser

Powered

Powered 1,71

optional

optional

-

3x HDMI(Deep Color, compatible with HDCP 2.3, 4K/60p signal input4), CEC supported
D-sub HD 15-pin (female)
D-sub HD 15-pin (female)
D-sub 9-pin (female) for external control/link control (RS-232C compliant)
D-sub 9-pin (male) for link control
M3 stereo mini-jack for wired remote control



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

D-sub 9-pin (female) for external control (parallel)
 Audio Mini Jack in und out
 RJ-45 (HDBaseT™ compliant),
 100Base-TX (Compatible with PJLink™ [Class 2]
 RJ-45 for network connection, 10Base-T
 100Base-TX (Compatible with PJLink™ [Class 2]
 USB Type A (for power supply, DC 5 V, 2 A)



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 465W Max / 390W in Eco Mode
 561 x 224 x 439 mm (22,1"x8,8"x17,3") 55,17 L/dm³
 34 / 27 dB in Eco Mode

Weight
 Keystone
 Illumination

18,60 kg / 39,68 lbs.
 -
 -

Frequenz


-

Foot-Lamberts

339 fL / max. 920 cm screen width
 1162 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- 24/7 continuous operation capable
- Lan network compatible.

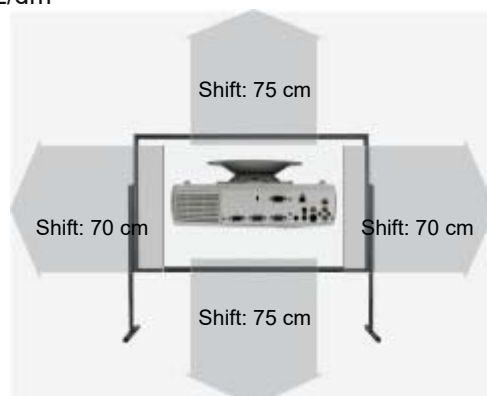

Optionaler Zubehör



Fernbedienung Original

N2QAYA000228

41,35 €



Objektiv Original

ET-ELW22 / LNS-W22

3.255,20 €



Objektiv Original

ET-ELW21 / LNS-W21

1.247,54 €



Objektiv Original

ET-ELW20 / LNS-W20

1.747,41 €

Objektiv Original

ET-ELU20

10.050,93 €

Objektiv Original

ET-ELT23 / LNS-T23

1.747,41 €



Objektiv Original

ET-ELT22 / LNS-T22

1.747,41 €



Objektiv Original

ET-ELS20 / LNS-S20

780,15 €



Deckenhalterung Länge 225 mm

Halterung45

85,80 €

Optional Lenses

Name

Ratio

Distance

Shift V

Shift H

Zoom

Zoom Optional Lenses

ET-ELW22	0.79-0.98:1	1.6-2 m	+/-60%	+/-30%	Powered
ET-ELW20	1.21-1.66:1	2.4-3.3 m			Powered
ET-ELU20	0.33-0.35:1	0.7-0.7 m	+/-50%	+/-24%	Powered
ET-ELT23	4.44-7.12:1	8.9-14.2 m	+/-67%	+/-35%	Powered
ET-ELT22	2.72-4.48:1	5.4-9 m	+/-67%	35-%	Powered
ET-ELS20 (Standart)	1.61-2.76:1	3.2-5.5 m	+/-67%	+/-35%	Powered

Status

2024 Current model // Last update of the data: 2025-02-17
Created: 2024-02-28 13:49:43



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptmz882-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.