

# Panasonic PT-REQ10 /BU/WU

PANASONIC PT-REQ10 /BU/WU



## Brief Introduction

Beta 2.5

The large-screen PT-REQ10 /BU/WU 3D laser DLP projector from Panasonic has 10000 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. Due to the laser, the projector is specified with 20000 hours of light life, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. An image width of up to 1016 cm is possible, if the image width is smaller (we recommend max. 677 cm), rooms with residual light are also no problem. If the image is still too small, the integrated edge blending software can help to project a large image with additional projectors. Playback of 1080P and 4K (compressed) as well as 3D is also no problem for the projector, meaning that all Blu-ray formats currently on offer can be recognized by the projector.



1 x 0,8" DLP Chip Quad Pixel Drive  
WUXGA 16/9 Ti Digital Light Processing Chip

## Display Type

### Ansi-Lumen

Projector 10000

Screen 4444 Lux (bei 200 cm Screen)

### Contrast

20000:1 full on/off

Screen 20000:1 full on/off

### Black Level

0,5000 min. Lumen

Screen 0,222 min. Lumen

### Lens shift

Vert.: +/-60% Hori.: +/-29%

### Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K+) 3840 x 2400 compressed

### Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

### 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom  
Frame Sequential (3D Ready)

### Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

### Light Source

Laserdiode

### Light Life

20000 h.

### Operating Costs

0,00 € Laser

### Focus

Powered

### Zoom

Powered 1,61

### Objective


-

### Throw Ratio

1,36-2,19:1

### Audio

Nein

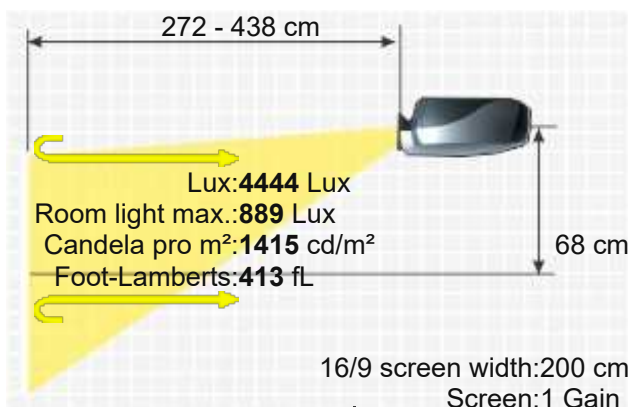

|                  |                                                  |
|------------------|--------------------------------------------------|
| Connections      | 2x HDMI in                                       |
|                  | DisplayPort                                      |
|                  | BNC in und out                                   |
|                  | Open slot for function boards, Intel® SDM        |
|                  | Mini Jack Audio in und out                       |
|                  | Mini-jack for wired remote control               |
|                  | 2x USB-A in                                      |
|                  | RS232C Din 9 pin in                              |
|                  | RJ45 in                                          |
|                  |                                                  |
| Ceiling Mounting | Yes, is possible.                                |
| Power            | 830W Normal / 640W Eco                           |
| Size WxHxD       | 498 x 212 x 538 mm (19,6"x8,3"x21,2") 56,8 L/dm³ |
| Operating Noise  | 37 / 33 dB in Eco Mode                           |


|              |                       |
|--------------|-----------------------|
| Weight       | 28,80 kg / 61,73 lbs. |
| Keystone     | Vert.: +/-40°         |
|              | Hori.: +/-40°         |
| Illumination | 90%                   |

Frequenz -

|               |                                    |
|---------------|------------------------------------|
| Foot-Lamberts | 413 fL / max. 1016 cm screen width |
|               | 1415 cd/m²                         |

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Blank (Black screen button)
- User logo
- Eco Mode
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Password protection
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.
- Crestron XiO Cloud
- AMX® DD
- 240hz
- Intel SDM
- NFC Function
- Lens Memory
- NFC via ET-NUK10 optional.

Screen Mirroring -

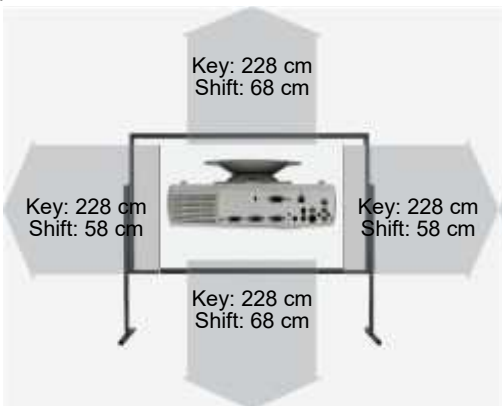

**Optional accessories**

|                        |              |             |
|------------------------|--------------|-------------|
| Fernbedienung Original | N2QAYA000252 | 50,69 €     |
| Objektiv Original      | ET-C1W500    | 5.864,51 €  |
| Objektiv Original      | ET-C1W400    | 5.864,51 €  |
| Objektiv Original      | ET-C1U100    | 17.015,23 € |
| Objektiv Original      | ET-C1T700    | 3.914,13 €  |
| Deckenhalterung 220    | Halterung45  | 83,60 €     |

**Optional Lenses**

| Name                 | Ratio       | Distance  | Shift V | Shift H | Zoom    |
|----------------------|-------------|-----------|---------|---------|---------|
| Zoom Optional Lenses |             |           |         |         |         |
| ET-C1W500            | 0.94-1.39:1 | 1.9-2.8 m | +/-60%  | +/-29%  | Powered |
| ET-C1W400            | 0.68-0.95:1 | 1.4-1.9 m | +/-60%  | +/-29%  | Powered |
| ET-C1W300            | 0.55-0.69:1 | 1.1-1.4 m | +/-60%  | +/-29%  | Powered |
| ET-C1U100            | 0.31-0.33:1 | 0.6-0.7 m | +/-60%  | +/-29%  | Powered |
| ET-C1T700            | 2.07-3.38:1 | 4.1-6.8 m | +/-60%  | +/-29%  | Powered |
| ET-C1S600            | 1.36-2.1:1  | 2.7-4.2 m | +/-60%  | +/-29%  | Powered |

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptreq10-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.  
HCinema is not responsible for any errors or omissions contained in product descriptions.