


Panasonic PT-RZ24K

PANASONIC PT-RZ24K

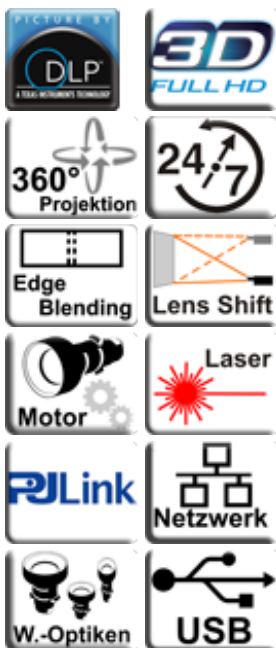

The large-screen Panasonic PT-RZ24K 3D laser DLP projector has 20000 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. With the lens shift function, the projector can be positioned very freely. 20000 Ansi lumens ensure that a picture width of 1437 cm is also possible. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 958 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 4K (compressed) as well as 3D are also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector.

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

3 x 0,8" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Projector 20000

20000:1 full on/off

1,0000 min. Lumen

Vert.: +/-66% Hori.: +/-20%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser diode

20000 h.

0,00 € Laser

Powered

Powered

optional


optional

Nein

8889 Lux (bei 200 cm Screen)


20000:1 full on/off

0,445 min. Lumen

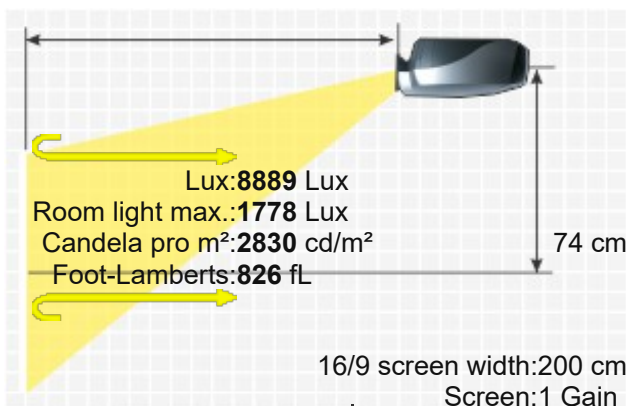

Connections	2 x HDMI in 1 x DisplayPort in 5 x BNC RGBHV in RS232C in und out SYNC IN und out USB Typ A RJ45 in Weitere Anschlüsse optional.
Ceiling Mounting	Yes, is possible.
Power	1380 / 1060W in Eco Mode
Size WxHxD	550 x 220 x 570 mm (21,7"x8,7"x22,4") 68,97 L/dm³
Operating Noise	46 / 43 dB in Eco Mode

Weight	35,00 kg / 77,16 lbs.
Keystone	Vert.: +/-45°
Illumination	Hori.: +/-40°
Frequenz	90%
Foot-Lamberts	-
Features	826 fL / max. 1437 cm screen width 2830 cd/m² ■ Real Full HD 3D ■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ 360° installable ■ 24/7 continuous operation capable ■ Edge Blending ■ PJLink™ ■ Lan network compatible. ■ DIGITAL LINK ■ NFC via ET-NUK10 optional.
Screen Mirroring	-

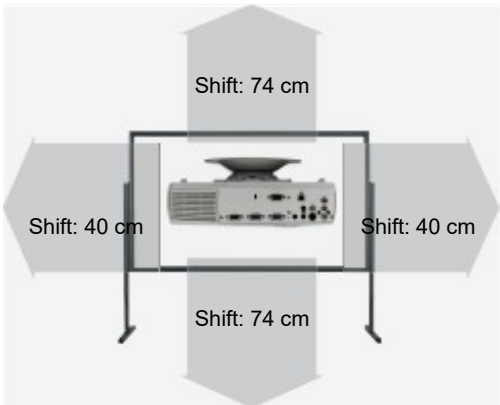

Optional accessories			
	Fernbedienung Original	N2QAYB001052 / N2QAYB001176	107,64 €
	Objektiv Original	ET-D75LE8	11.301,03 €
	Objektiv Original	ET-D75LE6	EOL €
	Objektiv Original	ET-D75LE50	6.703,67 €
	Objektiv Original	ET-D75LE40	5.273,78 €
	Objektiv Original	ET-D75LE30	3.991,38 €
	Objektiv Original	ET-D75LE20	3.711,02 €
	Objektiv Original	ET-D75LE10	5.273,02 €
	Objektiv Original	ET-D3LEW60	11.698,33 €
	Objektiv Original	ET-D3LEW50	6.317,58 €
	Objektiv Original	ET-D3LEW200	EOL €
	Objektiv Original	ET-D3LEU100	48.774,98 €
	Objektiv Original	ET-D3LET80	16.202,38 €
	Objektiv Original	ET-D3LET40	10.304,21 €



Objektiv Original

ET-D3LET30

7.301,51 €



Objektiv Original

ET-D3LES20

4.760,00 €

Deckenhalterung 220

Halterung45

83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
------	-------	----------	---------	---------	------

Zoom Optional Lenses

ET-D75LE8	7.8-13.8:1	15.6-27.6 m	+/-66%	+/-24%	Powered
ET-D75LE6	0.9-1.1:1	1.8-2.2 m	+/-44%	+/-15%	Powered
ET-D75LE40	4.6-7.4:1	9.2-14.8 m	+/-66%	+/-24%	Powered
ET-D75LE30	2.4-4.7:1	4.8-9.4 m	+/-66%	+/-24%	Powered
ET-D75LE20	1.7-2.4:1	3.4-4.8 m	+/-66%	+/-24%	Powered
ET-D75LE10	1.3-1.7:1	2.6-3.4 m	+/-66%	+/-24%	Powered
ET-D3LEW60	0.92-1.1:1	1.8-2.2 m	52% Fix		Powered
ET-D3LEW201	0.65-0.85:1	1.3-1.7 m	+/-57%	+/-18%	Powered
ET-D3LEW200	0.65-0.85:1	1.3-1.7 m	+/-57%	+/-18%	Powered
ET-D3LET80	7.34-13.8:1	14.7-27.6 m			Powered
ET-D3LET40	4.61-7.41:1	9.2-14.8 m	+/-66%	+/-24%	Powered
ET-D3LET30	2.4-4.66:1	4.8-9.3 m	+/-66%	+/-24%	Powered
ET-D3LES20	1.67-2.41:1	3.3-4.8 m			

Fix Optional Lenses

ET-D75LE90	0.36:1	0.7 m	78--73%	+/-6%	No Zoom
ET-D75LE50	0.7:1	1.4 m	50% Fix		No Zoom
ET-D3LEW50	0.69:1	1.4 m			No Zoom
ET-D3LEU101	0.37:1	0.7 m	+/-66%		No Zoom
ET-D3LEU100	0.37:1	0.7 m	+/-66%		No Zoom

Status

2022 Current model // Last update of the data: 2025-03-03

Created: 2022-03-03 08:50:06

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrz24k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.