

Panasonic PT-RZ34K

PANASONIC PT-RZ34K



The Panasonic PT-RZ34K large-format 3D laser DLP projector has 30500 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer Panasonic specifies a service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. An image width of up to 1774 cm is possible as the projector has 30500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 1183 cm. Video signals 1080P and 4K (compressed) as well as 3D are also no problem for the projector, meaning that all Blu-ray formats currently available can be recognized by the projector.



3 x 0,96" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

30500

20000:1 full on/off

1,5250 min. Lumen

Vert.: +/-55% Hori.: +/-20%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered

optional

optional

Nein

HDMI in
BNC in und out
D-sub 15pin in und out
Wired Remote in
USB in

13556 Lux (bei 200 cm Screen)

20000:1 full on/off

0,678 min. Lumen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen

Screen


Screen

Screen

Screen

Screen

Screen

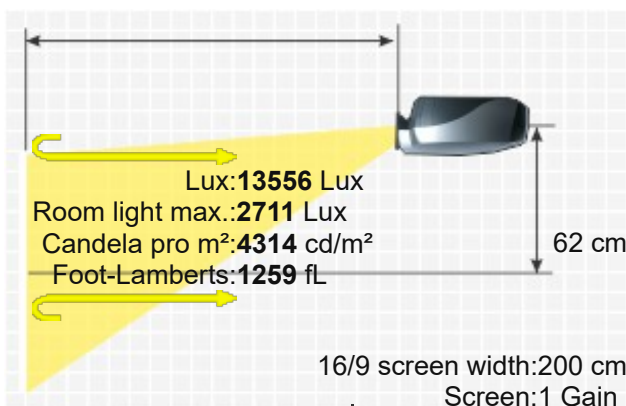

RS232C Din 9 pin in
 RJ45 in
 BNC x 1: 3G/HD-SDI input
 DVI-D 24-pin x 1 (DVI 1.0 compliant, compatible with HDCP) (Single-link only)
 3D SYNC IN/OUT
 Yes, is possible.

Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

-
 600 x 360 x 800 mm (23,6"x14,2"x31,5") 172,8 L/dm³
 -

Weight
 Keystone

70,00 kg / 154,32 lbs.
 Vert.: +/-45°
 Hori.: +/-40°

Illumination

-

Frequenz

-

Foot-Lamberts


1259 fL / max. 1774 cm screen width
 4314 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- NFC via ET-NUK10 optional.

Screen Mirroring

-

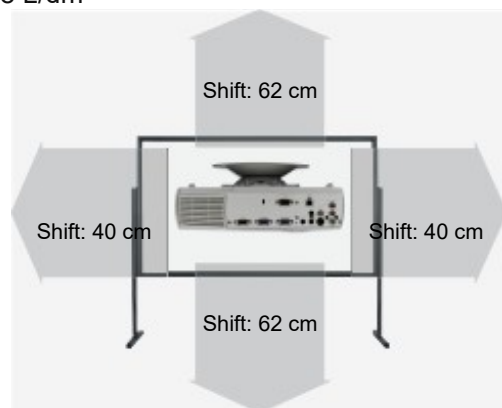

Optional accessories

	Objektiv Original	ET-D75LE8	11.301,03 €
	Objektiv Original	ET-D75LE6	EOL €
	Objektiv Original	ET-D75LE50	6.703,67 €
	Objektiv Original	ET-D75LE30	3.991,38 €
	Objektiv Original	ET-D3LEW200	EOL €
	Objektiv Original	ET-D3LEU100	48.774,98 €
	Objektiv Original	ET-D3LEW10	9.660,79 €
	Objektiv Original	ET-D3LET80	16.202,38 €
	Objektiv Original	ET-D3LET30	7.301,51 €
	Objektiv Original	ET-D3LET40	10.304,21 €
	Objektiv Original	ET-D3LES20	4.760,00 €
	Objektiv Original	ET-D3LEW60	11.698,33 €
	Objektiv Original	ET-D75LE95	EOL €
	Objektiv Original	ET-D75LE40	5.273,78 €
	Objektiv Original	ET-D75LE10	5.273,02 €



Objektiv Original

ET-D75LE20

3.711,02 €



Fernbedienung Original

N2QAYB001052 / N2QAYB001176

107,64 €

Deckenhalterung 220

Halterung45

83,60 €

Optional Lenses

Name

Ratio

Distance

Shift V

Shift H

Zoom

Zoom Optional Lenses

ET-D75LE8	7.34-13.8:1	14.7-27.6 m	+/-55%	+/-20%	Powered
ET-D75LE6	0.92-1.1:1	1.8-2.2 m	+/-44%	+/-15%	Powered
ET-D75LE40	4.62-7.38:1	9.2-14.8 m	+/-55%	+/-20%	Powered
ET-D75LE20	1.67-2.41:1	3.3-4.8 m	+/-55%	+/-20%	Powered
ET-D75LE10	1.3-1.67:1	2.6-3.3 m	+/-55%	+/-20%	Powered
ET-D3LEW201	0.65-0.85:1	1.3-1.7 m	+/-48%	+/-15%	Powered
ET-D3LEW200*	0.65-0.85:1	1.3-1.7 m	+/-48%	+/-15%	Powered
ET-D3LEW10*	1.26-1.72:1	2.5-3.4 m			Powered
ET-D3LET40*	4.61-7.41:1	9.2-14.8 m	+/-55%	+/-20%	Powered
ET-D3LET30* / ET-D75LE30	2.4-4.66:1	4.8-9.3 m	+/-55%	+/-20%	Powered
ET-D3LES20*	1.67-2.41:1	3.3-4.8 m	+/-55%	+/-20%	Powered
ET-D3LEW60	0.92-1.1:1	1.8-2.2 m	+/-44%	+/-15%	Powered
ET-D3LET80	7.34-13.8:1	14.7-27.6 m	+/-55%	+/-20%	Powered

Fix Optional Lenses

ET-D75LE95	0.36:1	0.7 m	78--68%	+/-12%	No Zoom
ET-D3LEW50 /ET-D75LE50	0.69:1	1.4 m	+/-55%	+/-20%	No Zoom
ET-D3LEU101*	0.37:1	0.7 m		25-0%	No Zoom
ET-D3LEU100*	0.37:1	0.7 m		25-0%	No Zoom

Status

2020 Current model // Last update of the data: 2025-03-03

Created: 2020-02-17 18:23:23

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrz34k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.