

SceneLights USB-Beamer



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The SceneLights USB projector model is an LED projector with VGA 640 x 480 resolution and a contrast of 100:1. The manufacturer SceneLights specifies a service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The projector is no longer sold by the manufacturer.



Projector

13

100:1 full on/off

0,1300 min. Lumen

VGA 640 x 480

307.200 Pixel

PAL, SECAM, NTSC,

Game-Portabel | Very portable, small-screen projections.

Very narrow picture width and rooms with very little light.

LED

20000 h.

0,00 € LED

Manual

No Zoom

-

-

-

USB 2.0

-

-

89 x 18,5 x 62 mm (3,5"x0,7"x2,4") 0,1 L/dm³

-

0,079 kg / 0,17 lbs.

-

-

-

-

-


-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Screen 4 Lux (bei 200 cm Screen)

100:1 full on/off

0,041 min. Lumen

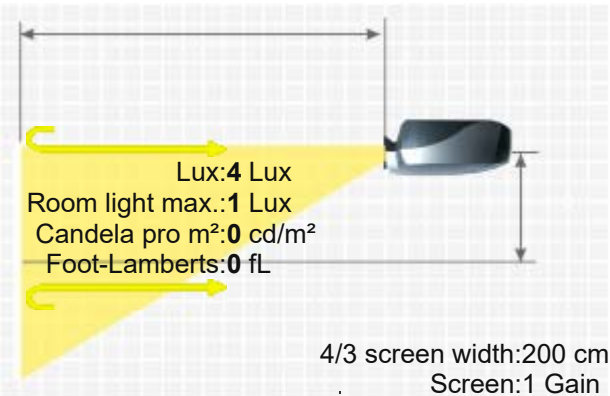



HCinema

<https://www.projector-database.com/pro/pearlsscenelightsusbbeamer-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.