


Planar PD7170



PLANAR PD7170



Brief Introduction

Beta 2.5

A brief introduction to the PD7170: The Planar home cinema DLP projector offers 2000 Ansi lumens, a contrast of 10000:1 and HDTV 1280 x 720 resolution. The integrated lens shift gives freedom when positioning the projector. 2000 Ansi lumens ensure that a picture width of 454 cm is also possible. However, if room light is available, the image should be a maximum of 303 cm wide. The model is also Full HD 1080P compatible. The model built in 2008 is no longer offered by Planar.

Display Type

1 x DC DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2000 889 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off 10000:1 full on/off

Black Level

0,2000 min. Lumen 0,089 min. Lumen

Lens shift

Vert.: +/-65% Hori.: +/-30%

Resolution

HDTV 1280 x 720

921.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

260 / 230W Lamp

Articel Nr.: 997-5353-00

Light Life

2500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,25

Objective

f=25,5-32,0 mm

Throw Ratio

1,82-2,28:1

Audio

-

Connections

2 x HDMI 1.3 (HDCP)

12V Trigger out

RS232C

Ceiling Mounting

Yes

Power

400W

Size WxHxD

643 x 225 x 519 mm (25,3"x8,9"x20,4") 75,09 L/dm³

Operating Noise

-

Weight

18,50 kg / 40,79 lbs.

Keystone

-

Illumination



-

Frequenz

-

Foot-Lamberts

83 fL / max. 454 cm screen width
284 cd/m²

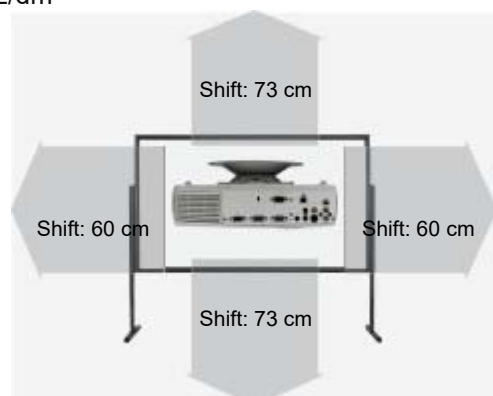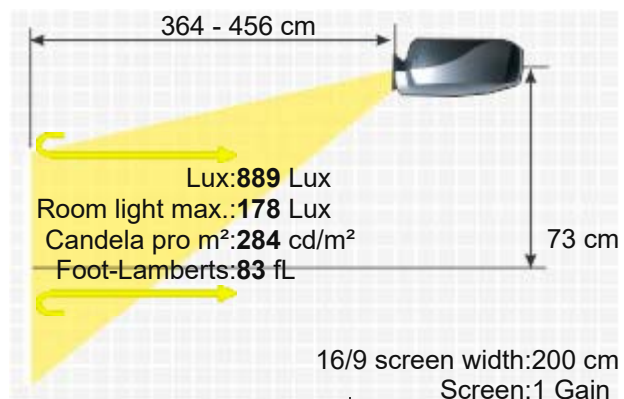

- Full HD 1080P compatible
- Lens shift Funktion
- Gamma correction
- Dynamic iris
- Picture-in-Picture
- Overscan adjustable

Features

Optional

Osram bulb only	NLMP18352
Lamp ruby	Ruby-LMP18352
Lamp original	997-5353-00

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18352>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Z80	1.52-1.82:1	3-3.6 m	+/-65%	+/-30%	Powered
Z500	4.56-7.09:1	9.1-14.2 m	+/-65%	+/-30%	Powered
Z400	3.04-4.56:1	6.1-9.1 m	+/-65%	+/-30%	Powered
Z200	2.28-3.04:1	4.6-6.1 m	+/-65%	+/-30%	Powered
Z100	1.82-2.28:1	3.6-4.6 m	+/-65%	+/-30%	Powered

Status Data 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/planarpd7170-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.