

PLUS U2 1080



Beta 2.5

With the U2 1080, manufacturer Plus offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 500:1 (full on/off) 350:1 (ANSI). The projector will be able to illuminate a picture width of 246 cm well. However, if room lighting is available, the picture width should ideally not exceed 164 cm. The model built in 1999 is no longer offered by Plus.

1 Chip DLP 0,86"

🔥 XGA 4/3 Ti Digital Light Processing Chip

Projector

800

500:1 (Full on/off) 350:1 (ANSI)

1,6000 min. Lumen

Screen

267 Lux (200 cm Screen width)

500:1 (Full on/off) 350:1 (ANSI)

0,537 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W P-VIP Lamp

Article Nr.: 28-650 / PU21080L

1000 h.

—

Manual

Manual 1.2

F=2,7-3,0 f=35,0-42 mm

2-2,4:1

1W Mono

HD D-sub 15pin x 1

Stereo Mini Jack x 1

Composite Video: RCA x 1

S-Video: DIN x 1

Audio (video): RCA x 2 (L,R)

Yes, is possible.

180W

235 x 58 x 297 mm (9,3"x2,3"x11,7") 4,05 L/dm³

—

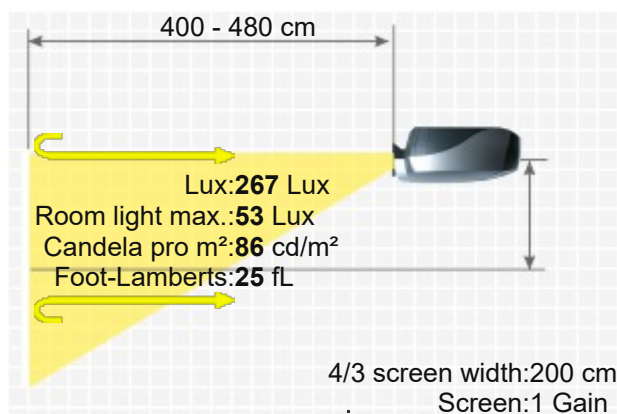
2,60 kg / 5,73 lbs.

—

—

—

25 fL / max. 246 cm screen width

86 cd/m²

Features	■ Remote control with laser pointer
Screen Mirroring	-
In Test	-

Optional accessories

	Nackte Osram Lampe	NLMP2947	EOL €
	Lampe Original	28-650 / PU21080L	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €

Status Data 1999 Discontinued (EOL) // Last update of the data: 2026-06-09

More Details



HCinema

<https://www.projector-database.com/pro/plusu21080-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.