

Premier PD X713

P R E M I E R P D X 7 1 3



Brief Introduction

Beta 2.5

Display Type

1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3500 1167 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

1,7500 min. Lumen 0,584 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

300W Lamp
1700 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

1 x 2W

Connections

DVI-D
D-sub 15pin in und out
S-Video in
Cinch video in
Mini Jack Audio in
USB in
RS232C

Ceiling Mounting


Yes

Power

350W

Size WxHxD

309 x 102 x 229 mm (12,2"x4"x9") 7,22 L/dm³

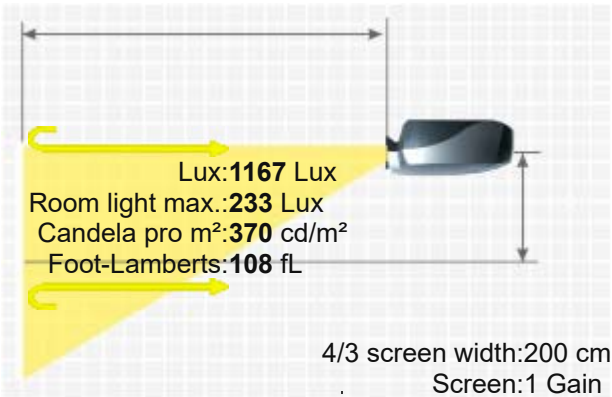

Operating Noise 35 / 32 dB in Eco Mode

Weight 3,20 kg / 7,05 lbs.
Keystone Vert.: +/-15°
Illumination 80%

Frequenz -

Foot-Lamberts 108 fL / max. 515 cm screen width
370 cd/m²

Features ■ Eco Mode
■ 4-segment RGBW colour wheel

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/premierpdx713-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.