

projectiondesign F22 sx+ medical

PROJECTIONDESIGN F22 SX+ MED



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

The projectiondesign model F22 sx+ medical is a DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 1500:1. Includes a lens shift and keystone correction function, which provides freedom during installation. The projector can illuminate an image width of up to 399 cm thanks to its 2100 Ansi lumens. In room lighting, however, the picture width should ideally be less than 266 cm. 1080P playback is also no problem for the projector. With only 24 decibels of operating noise, the model is already very quiet compared to others. The model built in 2009 is no longer offered by projectiondesign.



1 x DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Projector
2100
1500:1 full on/off
1,4000 min. Lumen

Screen
700 Lux (bei 200 cm Screen)
1500:1 full on/off
0,468 min. Lumen

Vert.: +50% -0%
SXGA+ 1400 x 1050
1.470.000 Pixel
HDTV 1920 x 1080 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.
220W UHP Lamp
Articel Nr.: 400-0402-00
3000 h. 2250 h. in high power mode

47,62% / 0,2 €

Manual

Manual 1,25


-

1,78-2,23:1

1 x 2W

HDMI 1.3
DVI-I mit HDCP in
D-sub 15pin in
S-Video in
Cinch Video in
RS232C Din 9pin in
12V Trigger out

Yes

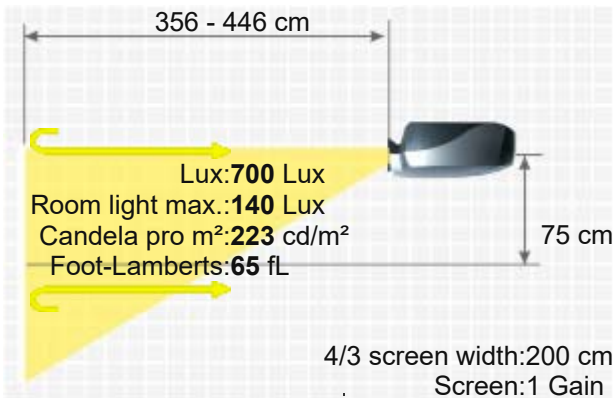

Power -
Size WxHxD 278 x 94 x 234 mm (10,9"x3,7"x9,2") 6,11 L/dm³
Operating Noise 24dB

Weight 3,00 kg / 6,61 lbs.
Keystone Vert.: +/-30°
Hori.: +/-15°
Illumination -
Frequenz H-sync: 15-150 kHz
V-sync: 48-190 Hz
Range max.: 205 MHz
Foot-Lamberts 65 fL / max. 399 cm screen width
223 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Gamma correction
 - 24/7 continuous operation capable
 - Password protection
 - BrilliantColor™
 - Remote control with laser pointer
 - Lan network compatible.
 - DICOM compliant pre-set calibrations
 - Faroudja De-Interlacer.
 - Programmable timer.

Optional	Bulb only	NLMP15413
	Bulb only	NLMP15413
	Lamp ruby	Ruby-LMP15413
	Lamp ruby	Ruby-LMP15413
	Lamp original	R9801265 / 400-0402-00
	Lamp original	R9801265 / 400-0402-00
	Compatible lamp	LMP-K15413
	Compatible lamp	LMP-K15413

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n9000692>


Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Fix Optional Lenses					
Wide angle 1:1	1:1	2 m	40%		No Zoom
Wide Angle 0.82:1	0.82:1	1.6 m	0.0% Fix		No Zoom

Status Data 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema
<https://www.projector-database.com/projectiondesignef22sxplusmedical-en.html>

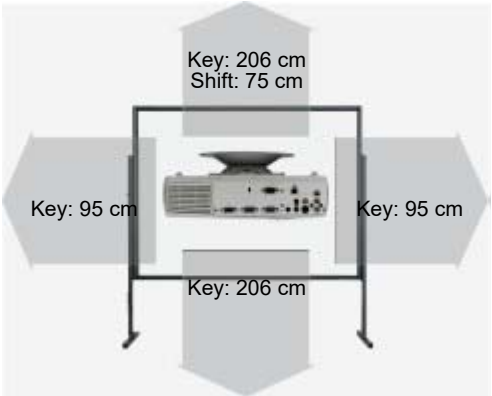

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.