

# Prolight PLF603VX



## Brief Introduction

Beta 2.5

### Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Prolight PLF603VX standard portable LCD projector has 1700 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. An image width of up to 359 cm is possible as the projector has 1700 Ansi lumens. However, if room light is available, the picture should be max. 239 cm wide. The projector was launched in 2006 and is no longer sold by the manufacturer.



3 x 0,63" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

1700

450:1 full on/off

3,7778 min. Lumen

Screen

567 Lux (bei 200 cm Screen)

450:1 full on/off

1,268 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

165W Lamp

2000 h.

-

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

2,03-2,5:1

1 x 2W

D-sub 15pin in und out

Cinch Video in

S-Video in

Mini Jack

RS232C

Yes

230W

244 x 97 x 319 mm (9,6"x3,8"x12,6") 7,55 L/dm³

37dB

3,10 kg / 6,83 lbs.

-

-

H-sync: 15-80 kHz


V-sync: 43-85 Hz

53 fL / max. 359 cm screen width

182 cd/m²

-

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

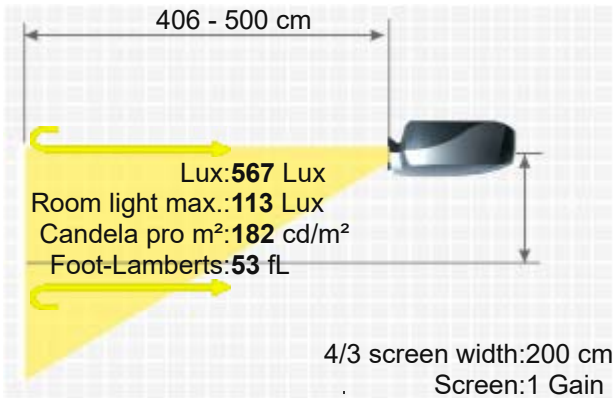

P R O L I G H T P L F 6 0 3 V X

More Details



# HCinema

<https://www.projector-database.com/pro/prolightPLF603VX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.