


# Prolight PLF893BX



## Brief Introduction

Beta 2.5

With the PLF893BX, manufacturer Prolight offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. The projector will be able to illuminate a 408 cm image width well. However, if room light is available, the picture width should ideally not exceed 272 cm. It was launched in 2006 and is no longer offered by the manufacturer Prolight.

 3 x 0,79" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

## Display Type

### Ansi-Lumen

2200

### Contrast

450:1 full on/off

### Black Level

4,8889 min. Lumen

### Offset

-

### Resolution

XGA 1024 x 768  
786.432 Pixel  
SXGA 1280 x 1024 compressed

### Video Modes

PAL, SECAM, NTSC

### Application

Standard-Portabel | External training and company presentations, as well as product presentations.  
Medium screen width or rooms with little light, max. 100 lumens.

### Light Source

195W Lamp

### Light Life

2000 h.

### Operating Costs

-

### Focus

Manual

### Zoom

Manual 1,23

### Objective

F=1,7-2,1 f=26-32 mm

### Throw Ratio

1,6-2,0:1

### Audio

1 x 2W

### Connections

DVI in  
D-sub 15pin in  
Cinch Video in  
S-Video in  
Mini Jack  
USB  
RS232C

### Ceiling Mounting

Yes

### Power

250W

### Size WxHxD

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm<sup>3</sup>

### Operating Noise

37dB

### Weight

3,10 kg / 6,83 lbs.

### Keystone

-

### Illumination


-

### Frequenz

H-sync: 15-80 kHz  
V-sync: 43-85 Hz

### Foot-Lamberts

68 fL / max. 408 cm screen width

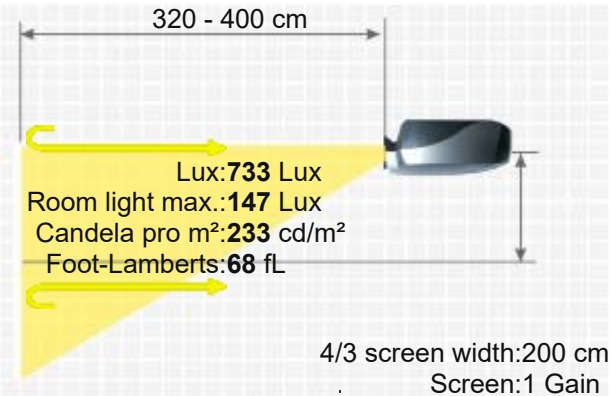

233 cd/m²

Features  
Status  
Data

-  
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/prolightPLF893BX-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.