

Desktop Projector™ 5610

super bright and extra light

**TWO COMPUTER AND
TWO VIDEO INPUTS**
accommodate multiple presenters

SVGA (800 X 600)
resolution for compatibility with the
latest PC and Macintosh computers

CONTROL PANEL
with easy-to-read functions

STEREO SPEAKERS
provide crisp, clear sound for
powerfull multimedia presentations

MOTORIZED ZOOM
lens allows placement anywhere
in the room


ADJUSTABLE FEET
elevate the projected image



DESKTOP PROJECTOR™ 5610 KEY BENEFITS


- produces extremely bright images (500 ANSI lumens), for use in well-lit rooms
- uses polysilicon LCD technology for exceptionally sharp, fully-saturated color images
- lightweight enough to take on the road
- displays SVGA (800 x 600) images true to your computer's output and supports compressed XGA (1024 x 768) resolution
- can be ceiling mounted and/or rear-screen projected
- includes ergonomic remote that puts you in control of your projector and computer without keeping you tied to either one
- designed for worldwide use, with NTSC, PAL, and SECAM video support and international power supplies

PROXIMA®
MULTIMEDIA PROJECTORS

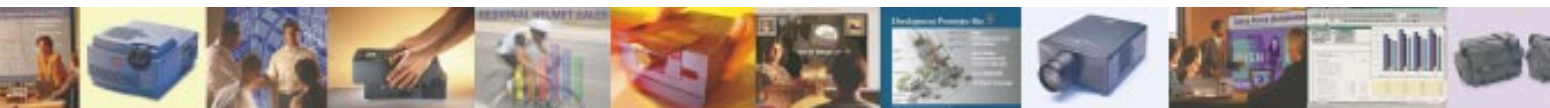


DP5610

DP5610 Set Up

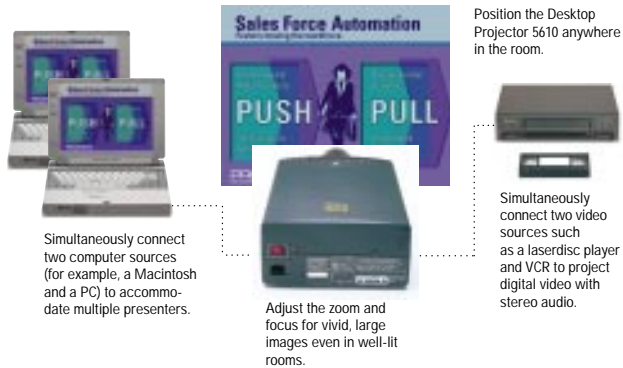

DP5610 Projection Distances/Image Sizes

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
3.6'	1.1 m	1.6'	0.5 m	2.7'	0.8 m
6.9'	2.1 m	3.0'	0.9 m	5.0'	1.5 m
11.8'	3.6 m	5.2'	1.6 m	8.3'	2.5 m
17.8'	5.4 m	7.8'	2.4 m	12.5'	3.8 m
23.7'	7.2 m	10.0'	3.2 m	16.7'	5.1 m
35.2'	10.7 m	15.7'	4.8 m	25.0'	7.6 m
47.0'	14.3 m	20.8'	6.4 m	33.3'	10.2 m

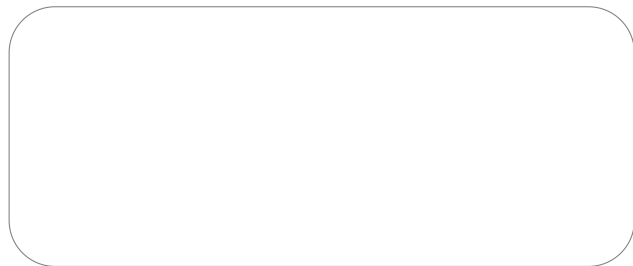

PROXIMA®
MULTIMEDIA PROJECTORS

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298,
(619) 457-5500, FAX (619) 457-9647, (800) 447-7692 (U.S. and Canada)

Latin American Office: 3191 Coral Way, Suite 622, Miami, FL,
33145-3213, (305) 445-6445, FAX (305) 445-6435

European Office: St. Thomas House, 28-32 Spittal Street, Marlow, Bucks.
SL7 1DB. U.K., +44 (0) 1628 481555, FAX +44 (0) 1628 487744

Proxima and Fit-to-View are registered trademarks of Proxima Corporation. Desktop Projector is a trademark of Proxima Corporation. Other trademarks are the property of their respective owners.
©1997 Proxima Corporation. All rights reserved. Specifications are subject to change without notice. Lumen and lamp life may vary depending on lamp manufacturer.

05/97 709-00495-1

WHAT'S INCLUDED

Model DP5610 includes:

- Infrared remote control with mouse control
- Universal I.E.C. power cord (U.S. and Europe)
- Product documentation
- Lens cap
- Two AA batteries
- VGA video cable, RS-232 cable, PS/2 cable, Macintosh ADB cable, Macintosh video adapter, composite audio/video cable, computer audio cable

ORDERING INFORMATION

Model Number

DP5610

For use worldwide

Optional Accessories

A298

Desktop Projector rolling soft case

A301

Desktop Projector rolling hard case

TECHNICAL SPECIFICATIONS

Computer Compatibility	<ul style="list-style-type: none"> ▪ IBM PC, PS/2, Pentium and compatibles ▪ Apple Macintosh, Power Macintosh, PowerBook and compatibles
Video Compatibility	<ul style="list-style-type: none"> ▪ NTSC & NTSC 4.43 ▪ PAL ▪ SECAM ▪ S-Video
Sources	<ul style="list-style-type: none"> ▪ 2 computer inputs ▪ 2 video inputs ▪ 4 stereo audio inputs
H-Sync Range	▪ 15 to 58 KHz
V-Sync Range	▪ 50 to 75 Hz
Brightness	▪ 500 ANSI lumens (typical)
Contrast Ratio	▪ 100:1 (typical)
Display Technology	▪ 1.3 in. polysilicon active-matrix TFT (Thin Film Transistor) x 3
Resolution	▪ 832 x 624 pixels
Resolutions Supported	▪ VGA (640 x 480), SVGA (800 x 600), Mac (832 x 624), XGA (1024 x 768, Fit-to-View®)
Keystone Correction	▪ 6.0°
Number of Colors	▪ 16.7 million
Image Size (Diagonal)	▪ 20 in. (0.5 cm) to 33.3 ft (10.2 m)
Projection Lens	▪ Projection (zoom) lens: f/2.5 (wide) to f/3.2 (telephoto) motorized zoom and focus, 1.77 in. to 2.95 in. (45 mm to 75 mm) focal length
Projection Distance (From Screen)	▪ 3.6 ft (1.1 m) to 75.6 ft (23.0 m)
Lamp	<ul style="list-style-type: none"> ▪ 250 watt metal halide ▪ "Replace Lamp" indicator light ▪ Lamp life: 1,000 hours to 50% brightness
Audio	<ul style="list-style-type: none"> ▪ Internal monitor speakers (stereo) ▪ Audio following video switching ▪ Line-level stereo audio out
Remote Control	▪ Including zoom and focus control, mouse control
Approvals	▪ FCC Class A, CE, UL, cUL, TÜV
Power Consumption	▪ 5.0/3.0A (Max Amperes); 360 watts
Power Requirements	▪ Auto switching 100 to 120 VAC, 200 to 265 VAC
Operating Temperature (Sea Level)	▪ 40°F (5°C) to 95°F (35°C)
Weight	▪ 16.0 lbs (7.2 kg)
Dimensions	<ul style="list-style-type: none"> ▪ 11.6 in. (W) x 18.1 in. (L) x 5.9 in. (H) ▪ 29.6 cm (W) x 45.9 cm (L) x 14.9 cm (H)
Warranty	▪ One year on parts and labor (excluding lamp)

