


Runco CL 810



RUNCO CL 810



Brief Introduction

Beta 2.5

With the CL 810, manufacturer Runco offers a DLP projector with HDTV 1280 x 720 resolution and a contrast of 3100:1. The built-in lens shift function provides freedom when setting up. A picture width of up to 359 cm is possible. However, the image should be smaller in room light. We recommend max. 239 cm. On the market since 2005, the model is no longer offered by the manufacturer Runco. It should also be noted that, unfortunately, there are no longer any replacement lamps available for the projector, neither originals nor replicas.



1 x DLP Chip

HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1250

556 Lux (bei 200 cm Screen)

Contrast

3100:1

3100:1

Black Level

0,4032 min. Lumen

0,179 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

HDTV 1280 x 720

921.600 Pixel

HDTV 1920 x 1080 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

250W / 200W im Eco Mode Lamp

Light Life

Articel Nr.: RUPA 007175

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,35

Objective

-

Throw Ratio

1,80-2,43:1

Audio

No

HDMI

5 x BNC RGBHV

YUV in


S-Video

Cinch Video in

RS232C

12V Trigger

Connections

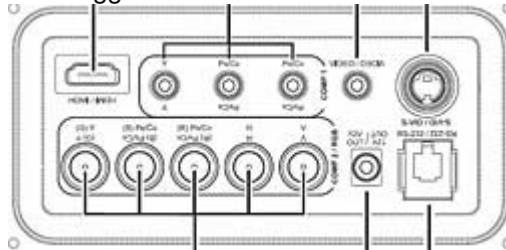

Ceiling Mounting


Yes

Power

310W

Size WxHxD

500 x 224,8 x 462,5 mm (19,7"x8,9"x18,2") 51,74 L/dm³

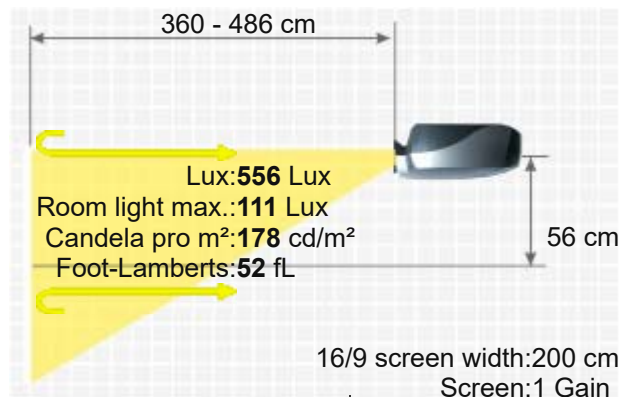

Operating Noise

-

Weight 15,42 kg / 34 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-80 kHz
V-sync: 50-100 Hz

Foot-Lamberts 52 fL / max. 359 cm screen width
178 cd/m²

- Features
- Lens shift Funktion
 - Eco Mode
 - Gamma correction
 - Dynamic iris
 - Digital image shift
 - Picture-in-Picture
 - Remote control with backlight
 - Overscan adjustable
 - De-interlacer with 3:2 pull down



Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Proteus F	3.65-5.68:1	7.3-11.4 m	63-20%		Powered
Runco Proteus E	2.42-3.57:1	4.8-7.1 m	71-14%		Powered
Runco Proteus D	1.82-2.38:1	3.6-4.8 m	70-13%	+/-13%	Powered
Runco Proteus C	1.45-1.75:1	2.9-3.5 m	70-10%		Powered
Runco Proteus B	1.22-1.44:1	2.4-2.9 m	72-11%		Powered

Fix Optional Lenses

Runco Proteus A	0.67:1	1.3 m	+/-2%		No Zoom
-----------------	--------	-------	-------	--	---------

Status 2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema

<https://www.projector-database.com/pro/runcocl810-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.