

# Runco VX 1000c

RUNCO VX 1000c



## Brief Introduction

Beta 2.5

A brief introduction to the Runco VX 1000c. The stationary DLP projector has an HDTV 1280 x 720 resolution and a contrast of 1000:1. The projector can be positioned very freely using the lens shift function. 1500 Ansi lumens ensure that a picture width of 393 cm is also possible. However, if room light is available, the picture should be a maximum of 262 cm wide. The model built in 2002 is no longer offered by Runco.



1 x DLP Chip  
HDTV 16/9 Ti Digital Light Processing Chip

## Display Type

## Ansi-Lumen

## Contrast

## Black Level

## Lens shift

## Resolution

## Video Modes

## Application

## Light Source

## Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

## Connections

## Ceiling Mounting

## Power

## Size WxHxD

## Operating Noise

1500

1000:1

1,5000 min. Lumen

Vert.: +/-50%

HDTV 1280 x 720

921.600 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

250W NSH Lamp

Articel Nr.: RUPA 003600

2000 h.

-

Powered

Powered 1,3

-

1,85-2,40:1

-

RGB/Component (from PFP Controller only), Computer (via HD15 connector)

Yes

365W

530 x 208 x 550 mm (20,9"x8,2"x21,7") 60,63 L/dm<sup>3</sup>


-

Screen

647 Lux (bei 203 cm Screen)

1000:1

0.649 min. Lumen

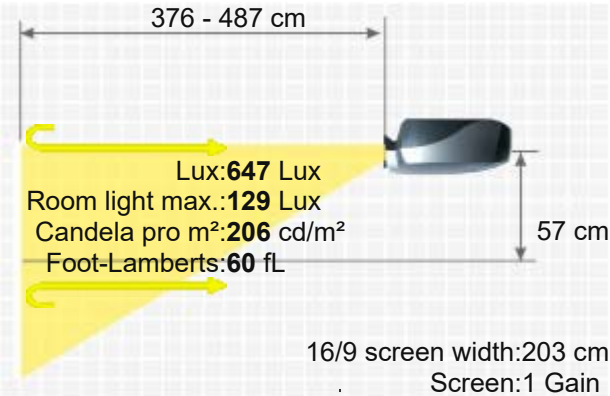

## Weight

23,00 kg / 50,71 lbs.

Keystone  
Illumination

-  
-

Frequenz

H-sync: 15-81 kHz  
V-sync: 43-100 Hz

Foot-Lamberts

60 fL / max. 393 cm screen width  
206 cd/m<sup>2</sup>

Features

- Lens shift Funktion
- Digital image shift
- External video processor included.

Status

2002 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



# HCinema

<https://www.projector-database.com/pro/runcovx1000c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.