

Sanyo PLC EF31E/L

SANYO PLC EF31E/L



The Sanyo PLC EF31E/L LCD projector has 5800 Ansi lumens, a contrast of 900:1 and an SXGA 1280 x 1024 resolution. The built-in lens shift function provides freedom when setting up. An image width of up to 645 cm is possible as the projector has 5800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 430 cm is recommended. This model is no longer offered by Sanyo.



3 x 1,8" LCD TFT Panel mit MLA
SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Projector	5800 / 2900 im singel lamp mode	Screen	1759 Lux (bei 203 cm Screen)
Contrast	900:1 full on/off		900:1 full on/off
Black Level	6,4444 min. Lumen		1.962 min. Lumen

Vert.: +/-40% (LNS S02 V=+/-50%)
SXGA 1280 x 1024

Resolution 1.310.720 Pixel

UXGA 1600 x 1200 compressed

Video Modes PAL, SECAM, NTSC, NTSC4.43, PAL-M/N

Application Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source 2 x 200W UHP Lamp

Article Nr.: 610 292 4848

Light Life 1000 h.

Operating Costs -

Focus Powered


Zoom Powered 1,3

Objective -

Throw Ratio 2,0-2,6:1

Audio 3W Stereo

Connections
1 x DVI
1 x Audio RCA x 2
Computer 2 / Video
5 x BNC / YUV
1 x Audio RCA x 2
1 x BNC Video/YC
1 x S-Video
1 x Audioaus. Eingang RCA x 2

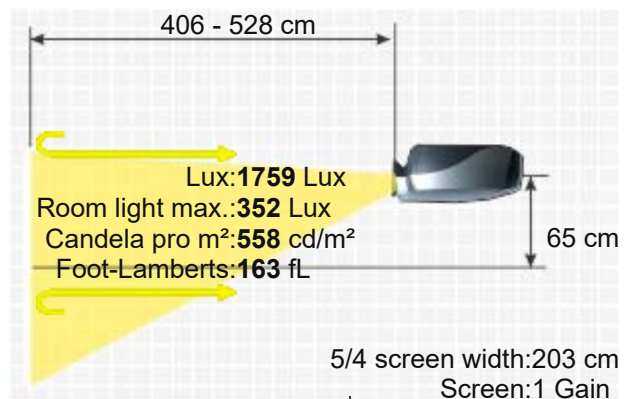

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

1 x USB

Control Port x 2

RS232C

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes

550W

439 x 227 x 604 mm (17,3"x8,9"x23,8") 60,19 L/dm³

45dB

Weight

Keystone

Illumination

21,00 kg / 46,3 lbs.

-

90%

Frequenz

H-sync: 15-120 kHz

V-sync: 50-120 Hz

Range max.: 230 MHz

Foot-Lamberts

163 fL / max. 645 cm screen width

558 cd/m²

- Features
- Lens shift Funktion (LNS S02 V=+/-50%)
 - Freeze
 - Kensington Slot
 - Gamma correction
 - Remote control with laser pointer und mouse control
 - Optional LAN network compatible.
 - Digital Zoom
 - RJ45 connector board optionally available
 - Faroudja DCDi optionally available
 - 10-bit digital gamma correction

Optional

Single Philips bulb only

Single lamp ruby

Single lamp original

Compatible lamp

Universal Remote original

Remote control original

NLMP3349

Ruby-LMP3349

610-292-4848 / LMP39 / ET-SLMP39

LMP-K1328

Fernb-uni-V3

645 047 7867 / CXJT

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3351>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W06	1.2-1.5:1	2.4-3 m	+/-40%		Powered
Sanyo LNS-W04	1.54-2.03:1	3.1-4.1 m	+/-40%		Powered
Sanyo LNS-W02Z	1.4-1.8:1	2.8-3.7 m	+/-40%		Powered
Sanyo LNS-T03	6.2-9.1:1	12.6-18.5 m	+/-40%		Powered
Sanyo LNS-S03	2.6-3.5:1	5.3-7.1 m	+/-40%		Powered
Sanyo LNS-S02Z	2-2.6:1	4.1-5.3 m	+/-50%		Powered
Sanyo LNS-M01Z	3.5-4.5:1	7.1-9.1 m	+/-40%		Powered
Sanyo LNS-T02	4.4-6.2:1	8.9-12.6 m	+/-40%		Powered
Fix Optional Lenses					
Sanyo LNS-W03	0.8:1	1.6 m	0.0% Fix		No Zoom
Sanyo LNS-W01Z	1.2:1	2.4 m	+/-40%		No Zoom
Sanyo LNS-T01Z	7:1	14.2 m	+/-40%		No Zoom
Status	2003 Discontinued (EOL) // Last update of the data: 2023-08-04				





HCinema

<https://www.projector-database.com/pro/sanyoplcef31-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.