

Sanyo PLC EF60/A

SANYO PLC EF60/A



Brief Introduction

Beta 2.5

A brief introduction to the Sanyo PLC EF60/A. The stationary LCD projector has an SXGA+ 1400 x 1050 resolution and a contrast of 1300:1. The integrated lens shift gives freedom when positioning the projector. An image width of up to 663 cm is possible as the projector has 5800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 442 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. This model is no longer offered by Sanyo.



3 x 1,4" LCD TFT Panel mit MLA
SXGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

5800 / 4650 im singel lamp Mode 1933 Lux (bei 200 cm Screen)

Contrast

1300:1 full on/off 1300:1 full on/off

Black Level

4,4615 min. Lumen 1,49 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-10% motorisch max.

Resolution

SXGA+ 1400 x 1050

1.470.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, EDTV HDTV 720p, 1080i,

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 300W UHP Lamp

Articel Nr.: 610 315 7689

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

2 x 3W Stereo

Connections

DVI-D mit HDCP


D-sub 15pin

5 x BNC RGBHV

YUV

S-Video


Cinch Video

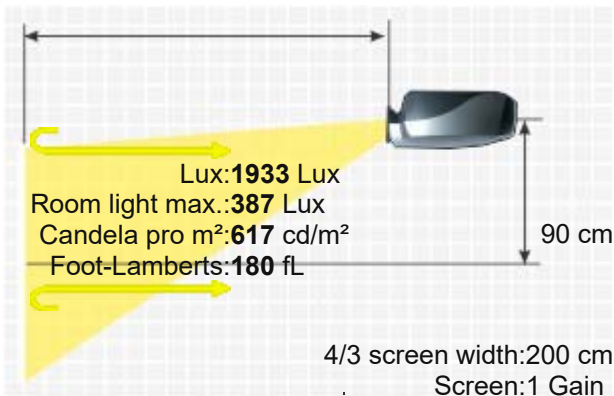

Cinch Stereo in
 USB Typ A, B
 RS232C
 Weitere AnschlEse optional

Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 900W / 13W standby
 518 x 252 x 606 mm (20,4"x9,9"x23,9") 79,1 L/dm³
 42 / 39 dB in Eco Mode

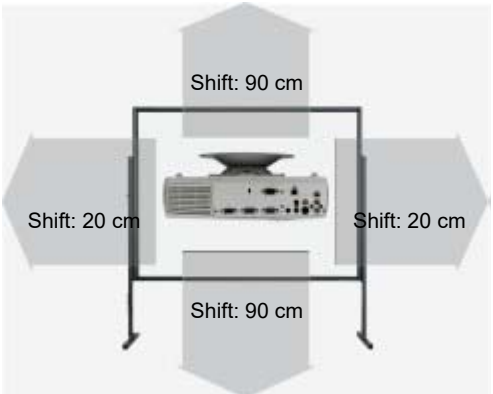

Weight
 Keystone
 Illumination
 Frequenz
 Foot-Lamberts

25,00 kg / 55,12 lbs.
 Vert.: +/-35°
 90%
 H-sync: 15-120 kHz
 V-sync: 48-120 Hz
 Range max.: 230 MHz
 180 fL / max. 663 cm screen width
 617 cd/m²

Features

- Lens shift Funktion motorisch max.
 - User logo
 - Eco Mode
 - Gamma correction
 - Dynamic iris
 - Warping
 - 360° installable
 - Edge Blending
 - Password protection
 - Remote control with mouse control
 - Optional LAN network compatible.
 -
- Modell EF60A:

Please note

- kein integriertes Warp & Blending Board (nur noch optional)
- keine Lautsprecher + keine Audio Eingänge
- kein Touchpanel fE MenEuerung
- Lieferumfang: kein DVI Kabel, kein FB Kabel. keine StaubhEle, kein Advanced Screen Manager fE das Warp&Edge Blending board.

Optional

Bulb only	NLMP3409
Single lamp ruby	Ruby-LMP3409
Single lamp original	610-315-7689 / LMP80 / ET-SLMP80
Compatible lamp	LMP-K1350
Universal Remote original	Fernb-uni-V3
Object lens original	ET-SW07 / LNS-W07
Object lens original	ET-SW05 / LNS-W05
Remote control original	945 068 1593 / CXRY
Air filter original	POA-FIL-140 / 910-315-1589 / ET-SFYL140

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n4550>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W06	1.5-2:1	3-4 m	+/-50%	+/-10%	Powered
Sanyo LNS-W05	1.2-1.7:1	2.4-3.4 m	+/-50%	+/-10%	Powered
Sanyo LNS-W04	2-2.6:1	4-5.2 m	+/-50%	+/-10%	Powered
Sanyo LNS-W02Z	1.8-2.3:1	3.6-4.6 m	+/-50%	+/-10%	Powered
Sanyo LNS-T03	8.1-11.6:1	16.2-23.2 m	+/-50%	+/-10%	Powered
Sanyo LNS-T02	5.6-8:1	11.2-16 m	+/-50%	+/-10%	Powered
Sanyo LNS-S03	3.3-4.5:1	6.6-9 m	+/-50%	+/-10%	Powered
Sanyo LNS-M01Z	4.5-5.8:1	9-11.6 m	+/-50%	+/-10%	Powered
Sanyo LNS-S02Z	2.6-3.3:1	5.2-6.6 m	+/-60%	+/-10%	Powered
Fix Optional Lenses					
Sanyo LNS-W07	0.7:1	1.4 m	0.0% Fix		No Zoom

Sanyo LNS-W03	1:1	2 m	0.0% Fix	No Zoom
Sanyo LNS-W01Z	1.5:1	3 m	+/-50%	+/-10% No Zoom
Sanyo LNS-T01Z	8.9:1	17.8 m	+/-50%	+/-10% No Zoom
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04			

Data



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplcef60-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.