

Sanyo PLC XF42

SANYO PLC XF42



Brief Introduction

Beta 2.5

The PLC XF42 LCD projector from Sanyo has 9000 Ansi lumens, a contrast of 1100:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 826 cm is possible, if the image width is smaller (we recommend max. 551 cm), rooms with residual light are also no problem. On the market since 2007, the model is no longer offered by the manufacturer Sanyo.

Display Type



3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

9000 / 4500 im singel lamp mode

3000 Lux (bei 200 cm Screen)

Contrast

1100:1 full on/off

1100:1 full on/off

Black Level

8,1818 min. Lumen

2,735 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10% maximal

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N HDTV 1080i, 720p 480p 1035i

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

4 x 250W UHP Lamp

Articel Nr.: 6103000862

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

3W Stereo

Connections

1 x DVI-I mit HDCP

1 x Audio RCA x 2

Computer 2 / Video

5 x BNC / YUV

1 x Audio RCA x 2


1 x BNC Video/YC

1 x S-Video

1 x Audioaus. Eingang RCA x 2

1 x USB

Control Port x 2

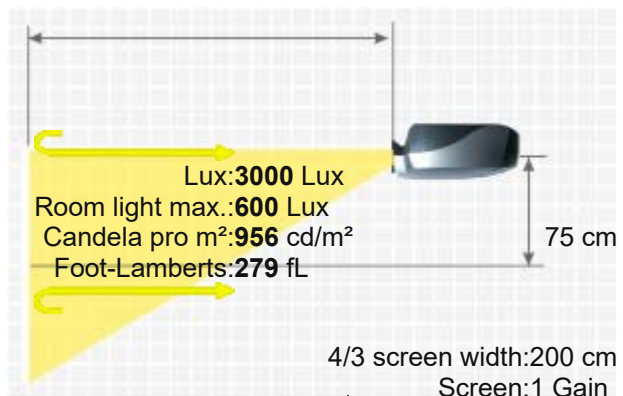

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RS232C
Yes
1500W
581 x 251 x 791 mm (22,9"x9,9"x31,1") 115,35 L/dm³
46dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

37,50 kg / 82,67 lbs.
Vert.: +/-40°
90%
H-sync: 15-120 kHz
V-sync: 50-120 Hz
Range max.: 230 MHz
279 fL / max. 826 cm screen width
956 cd/m²

- Lens shift Funktion maximal
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Remote control with laser pointer und mouse control
- Optional LAN network compatible.
- Digital Zoom
- 3D-AUCC
- Intelligent sharpness optimisation
- Faroudja DCDi optionally available
- Adapts to all mains voltages.


Single Osram bulb only
Single lamp ruby
Single lamp original
Compatible lamp
Universal Remote original
Air filter compatible
Remote control original
Air filter original

NLMP3387
Ruby-LMP3387
610-300-0862 / LMP49 / ET-SLMP49
LMP-K1333
Fernb-uni-V3
Alternative zu:MT8A / 910 301 4815
945 088 0750 / CXVC/CXVY
MT8A / 910 301 4815

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n17071>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W02	1.4-1.8:1	2.8-3.6 m	+/-40%	+/-10%	Powered
LNS-T03	6.2-9.1:1	12.4-18.2 m	+/-40%	+/-10%	Powered
LNS-S03	2.6-3.5:1	5.2-7 m	+/-40%	+/-10%	Powered
LNS-S02	2-2.6:1	4-5.2 m	+/-50%	+/-10%	Powered
LNS-M01	3.5-4.5:1	7-9 m	+/-40%	+/-10%	Powered
LNS-T02	4.4-6.2:1	8.8-12.4 m	+/-40%	+/-10%	Powered
Fix Optional Lenses					
LNS-W03	0.8:1	1.6 m	0.0% Fix		No Zoom
LNS-W01	1.2:1	2.4 m	+/-40%	+/-10%	No Zoom
LNS-T01	7:1	14 m	+/-40%	+/-10%	No Zoom

Status
2007 Discontinued (EOL) // Last update of the data: 2023-08-04

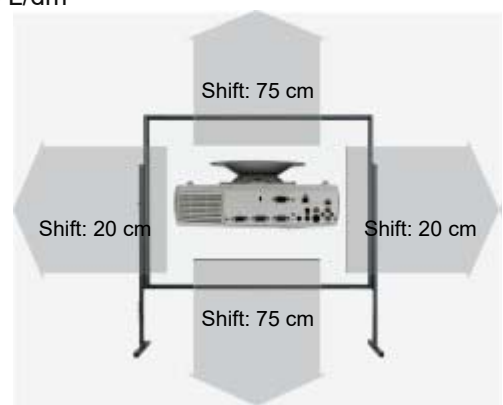



HCinema

<https://www.projector-database.com/pro/sanyoplcf42-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.