

Sanyo PLC XP51E/L

SANYO PLC XP51E/L



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Sanyo PLC XP51E/L stationary LCD projector has 4000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. 4000 Ansi lumens ensure that a picture width of 551 cm is also possible. The projector creates rooms with residual light with a smaller image width, max. 367 cm is recommended. This model is no longer offered by Sanyo.



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4000
1000:1 full on/off
4,0000 min. Lumen
Vert.: +50% -0% motorisch
XGA 1024 x 768

Screen

1333 Lux (200 cm Screen width)
1000:1 full on/off
1,337 min. Lumen

UXGA 1600 x 1200 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

300W NSH Lamp
Article Nr.: 610 314 9127
1500 h.

Powered


Powered 1,3

f=48,2-62,6 mm / EL optional

1,8-2,3:1

2 x 2W Stereo

DVI-D
D-sub 15pin in oder out
5 x BNC RGBHV in
YUV in
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack

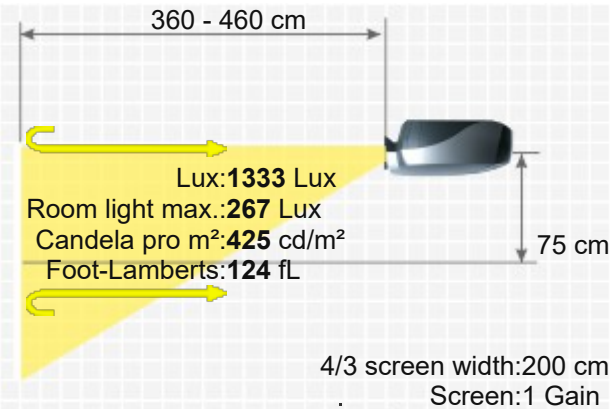

USB Typ B

RS232C

Kabelfernbedienung

Yes, is possible.

450W standby 15W

319 x 168 x 430 mm (12,6"x6,6"x16,9") 23,04 L/dm³

39 / 35 dB in Eco Mode

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

8,70 kg / 19,18 lbs.

Vert.: +/-40°

Hori.: +/-10°

90%

H-sync: 15-100 kHz

V-sync: 50-100 Hz

Range max.: 160 MHz

124 fL / max. 551 cm screen width

425 cd/m²

- Features

Screen Mirroring

■ Lens shift Funktion motorisch

■ Freeze

■ User logo

■ Eco Mode

■ Kensington Slot

■ Gamma correction

■ Remote control with laser pointer und mouse control

■ Optional Wi-Fi network compatible.

■ Optional LAN network compatible.

■ Auto Picture Control

■ Digital Zoom

■ Colour Management System

■ De-interlacer with 3:2 pulldown

■ RJ45 optional via Net Work Manager model POA-PN01

-
-
- Optional accessories
- | | | | |
|--|----------------------------------|----------------------------------|----------|
|  | Nackte Lampe | NLMP3431 | 89,55 € |
|  | Lampe Ruby | Ruby-LMP3431 | 161,39 € |
|  | Lampe Original | 610-314-9127 / LMP81 / ET-SLMP81 | EOL € |
|  | Kompatible Lampe | LMP-K1352 | 79,80 € |
| | Objektiv Original | ET-ST31A / LNS-T31A | EOL € |
| | Objektiv Original | ET-ST32 / LNS-T32 | EOL € |
| | Objektiv Original | ET-SW31A / LNS-W31A | EOL € |
|  | Universal Fernbedienung | Fernb-uni-V3 | 22,31 € |
| | Fernbedienung Original | 945 060 2239 | EOL € |
|  | Luftfilter (klein) Original | POA-FIL-130-k / 910 303 8781 | EOL € |
|  | Luftfilter (gross) Original | POA-FIL-130-g / 910 303 8774 | EOL € |
|  | Deckenhalterung Länge 100-120 mm | Halterung120 | 47,86 € |
- Optional Lenses
- | Name | Ratio | Distance | Shift V | Shift H | Zoom |
|----------|-------------|------------|----------|---------|---------|
| LNS-T32 | 4.12-5.56:1 | 824-1112 m | 50% | | Powered |
| LNS-T31A | 2.31-4.19:1 | 462-838 m | 50% | | Powered |
| LNS-W31A | 1.26-1.81:1 | 252-362 m | 50% | | Powered |
| LNS-W32 | 0.81:1 | 162 m | 0.0% Fix | | No Zoom |
- Status

2004 Discontinued (EOL) // Last update of the data: 2026-06-09
-

Data



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplcxp51el-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.