

Sanyo PLC XT20/L

SANYO PLC XT20/L



Brief Introduction

Beta 2.5

A brief introduction to the Sanyo PLC XT20/L. The stationary LCD projector has an XGA 1024 x 768 resolution and a contrast of 800:1. The projector also offers a lens shift function, which makes setting up the image childs play. 515 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm here. The model built in 2006 is no longer offered by Sanyo.

Display Type



3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3500

1167 Lux (bei 200 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

4,3750 min. Lumen

1,464 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-15% motorisiert

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300W UHP Lamp

Articel Nr.: LMP 105

Light Life

1500 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,9-2,1 f=33-43 mm / L optional

Throw Ratio


1,62-2,11:1


Audio

1W Stereo

Connections

DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 8pin in
USB Typ B

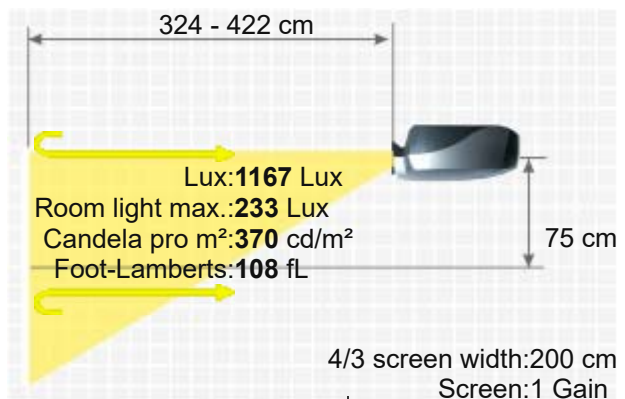

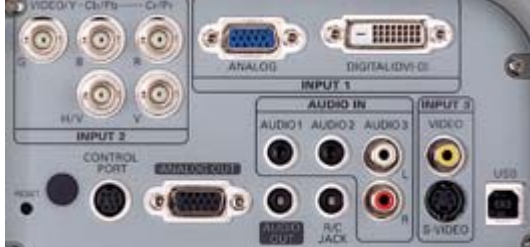


Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
430W
348 x 156,5 x 444 mm (13,7"x6,2"x17,5") 24,1 L/dm³
30 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

10,00 kg / 22,05 lbs.
Vert. +40°-20°
Hori.: +/-10°
85%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 100 MHz
108 fL / max. 515 cm screen width
370 cd/m²

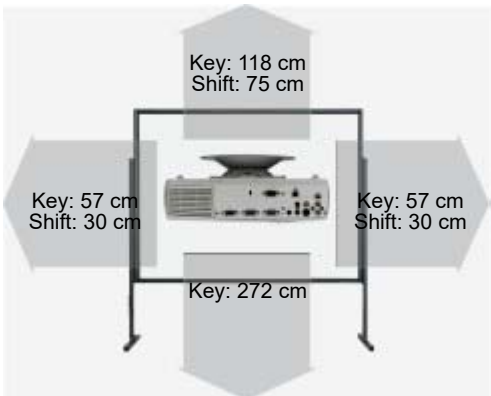

Features

- Lens shift Funktion motorisiert
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer
- Optional Wi-Fi network compatible.
- Optional LAN network compatible.
- Digital Zoom.
- Automatic display of air pollution.
- Vertical operation possible (up to 90°).
- De-interlacer with 3:2 2:2 pull down.

Please note Laut USA Prospekt 3800 Ansi-Lumen und 1000:1 Kontrast.

Bulb only	NLMP16004
Lamp ruby	Ruby-LMP16004
Lamp original	610-330-7329 / LMP105 / ET-SLMP105
Compatible lamp	LMP-K16004
Universal Remote original	Fernb-uni-V3
Air filter compatible	Alternative zu:MZ7A / 910 330 7184
Remote control original	9450871468 / CXTK
Air filter original	MZ7A / 910 330 7184
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16004>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W10	1.24-1.63:1	2.5-3.3 m	50%	+/-15%	Powered
LNS-T11	3.43-5.43:1	6.9-10.9 m	50%	+/-15%	Powered
LNS-T10	2.13-3.46:1	4.3-6.9 m	50%		Powered
Fix Optional Lenses					
LNS-W11	0.82:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2006 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/sanyoplctx20-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.