

# Saville SS 1200



Brief Introduction  
Beta 2.5

Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

Resolution

Video Modes

Application

Light Source  
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Weight  
Keystone  
Illumination

Frequenz

Foot-Lamberts

Features

Status

The Saville SS 1200 standard portable LCD projector has 1500 Ansi lumens, a contrast of 450:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 337 cm well. However, if room light is available, the image width should ideally not exceed 225 cm. This model is no longer available from Saville.



3 x 0,79" LCD TFT Panel  
SVGA 4/3 Liquid Crystal Display

Projector

1500  
450:1 full on/off  
3,3333 min. Lumen

500 Lux (bei 200 cm Screen)  
450:1 full on/off  
1,119 min. Lumen

SVGA 800 x 600  
480.000 Pixel

XGA 1024 x 768 compressed

NTSC3,58, NTSC4,43, PAL60, SECAM, DTV, 480i, 480p, 580i, 580p, 720p, 1.080i  
Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

165W UHP Lamp  
3000 h. 4500 h. in Eco Mode

Manual

Manual 1,19

F=1,9-2,2 f=26-31 mm

1,6-1,9:1

1W Mono

D-sub 15pin in  
S-video in  
Cinch Video in  
RS232C

Yes

240 / 190W in Eco mode  
297 x 89 x 229 mm (11,7"x3,5"x9") 6,05 L/dm<sup>3</sup>  
35 / 31 dB in Eco Mode


2,90 kg / 4,41 lbs.  
Vertical  
95%

H-sync: 15-70 kHz  
V-sync: 43-85 Hz  
Range max.: 108 MHz

46 fL / max. 337 cm screen width  
158 cd/m<sup>2</sup>

■ Eco Mode

- Discontinued (EOL) // Last update of the data: 2023-08-30

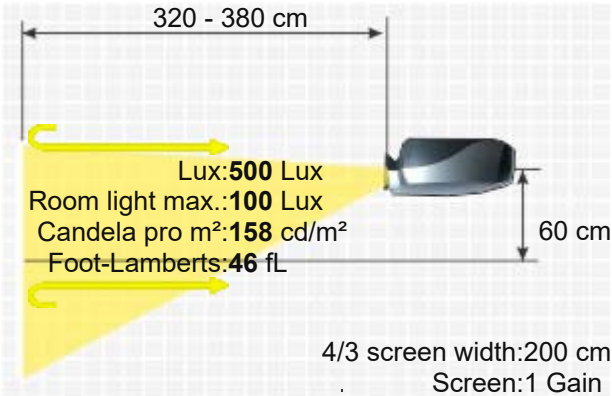

S  
A  
V  
I  
L  
L  
E  
  
S  
S  
  
1  
2  
0  
0

More Details



# HCinema

<https://www.projector-database.com/pro/savilles1200-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.