

SIM2 EVSX1



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Lens shift

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight

The SIM2 EVSX1 standard portable DLP projector has 2000 Ansi lumens, a contrast of 2500:1 and an SXGA+ 1400 x 1050 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 389 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 259 cm. Even 1080P video signals are no problem for the projector. The model built in 2005 is no longer offered by SIM2. It should also be noted that, unfortunately, there are no longer any replacement lamps for the projector, neither originals nor replicas.



1 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Projector

2000
2500:1 full on/off
0,8000 min. Lumen
Vert.: +/-30% manuell
SXGA+ 1400 x 1050

Screen

667 Lux (bei 200 cm Screen)
2500:1 full on/off
0,267 min. Lumen

Resolution

1.470.000 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

160-200W dimmbar Lamp
Article Nr.: Z930100326
2000 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Powered
Powered 1,34

Zoom

f=32-43 mm

Objective

1,64-2,24:1

Throw Ratio

Nein

Audio

1 x HDMI mit HDCP
1 x S-Video
1 x RGBs/YCrCb (4x RCA)
1 x D-Sub 15 pin in
1 x RS232 Din 9 pin
1 x optical S/PDIF audio output from HDMI
1x DVI+HDCP via DVI-HDMI supplied cable
2 x 12V Trigger

Connections

Yes, is possible.

Ceiling Mounting

260W
352 x 174 x 318 mm (13,9"x6,9"x12,5") 19,48 L/dm³


Power

-


Size WxHxD

5,00 kg / 11,02 lbs.

Operating Noise

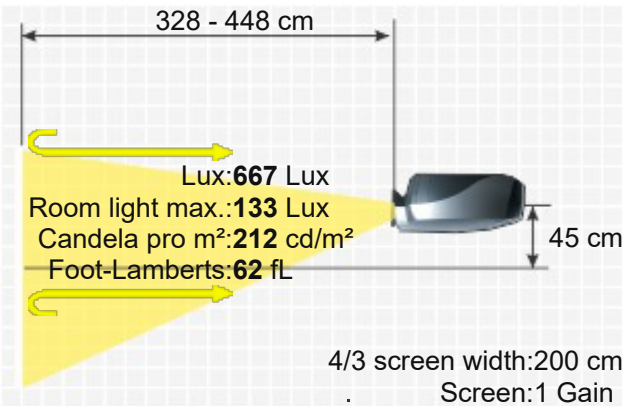

Keystone Illumination	Vertical -
Frequenz	H-sync: 15,0-80,0 kHz V-sync: 48-100 Hz
Foot-Lamberts	62 fL / max. 389 cm screen width 212 cd/m ² ■ Full HD 1080P compatible ■ Lens shift Funktion manuell ■ Eco Mode
Features	■ Overscan adjustable ■ Faroudja DCDi ■ 4-segment 2-speed colour wheel ■ Digital Zoom
Screen Mirroring	-

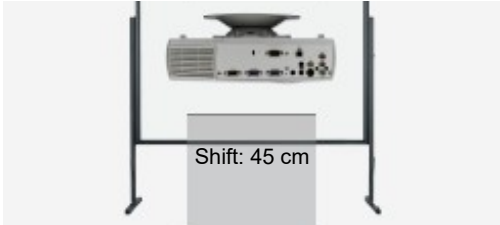

Optional accessories

	Osram Lampe Original	Z930100326	EOL €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €

Status Data 2005 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/sim2evsx1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.