

# SIM2 SVD 800 HD



SIM2 SVD 800 HD



7" ESF CRT Röhre  
SXGA 5/4 Elektrostatik Fokussierte Röhre

Projector

913 1050 Lumen  
-  
-

Screen

285 Lux (bei 200 cm Screen)  
-  
-

Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

SXGA 1280 x 1024  
1.310.720 Pixel

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV

CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.

CRT Röhre

ca. 10000 - 20000 h. (je nach Anwendung)

Powered

No Zoom

HD 145

-

-

5 mal BNC Eingang 5 mal Ausgang  
YUV per BNC Buchsen Eingang  
D-sub 15pin in  
Cinch Video in per einer BNC Buchse  
S Video Eingang und Ausgang  
Serial Interface per VGA

Yes

500W

620 x 340 x 700 mm (24,4"x13,4"x27,6") 147,56 L/dm³

-

48,50 kg / 106,92 lbs.

-

-

H-sync: 15-72 kHz

V-sync: 45-150 Hz


Range max.: 75 MHz

27 fL / max. 256 cm screen width

93 cd/m²

■ Freeze

- Discontinued (EOL) // Last update of the data: 2023-08-04

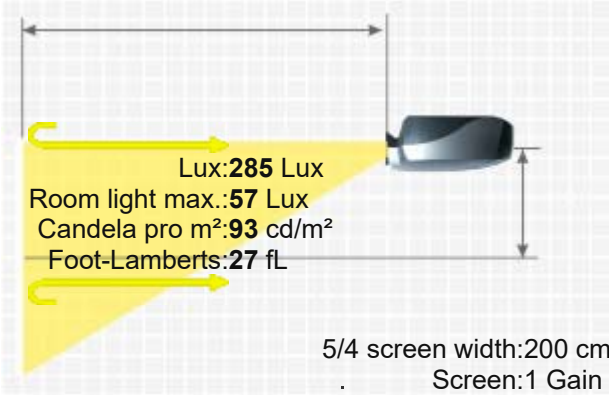

HCinema

<https://www.projector-database.com/pro/sim2svd800hd-en.html>

More Details

