

Sony SRX R515P / SRXR515DS

SONY SRX R515P / SRXR515DS



The SRX R515P / SRXR515DS 3D SXR D has 15000 Ansi lumens, a contrast of 8000:1 and a UHD (4K+2K) 4096 x 2160 resolution. With the lens shift function, the projector can be positioned very freely. 15000 Ansi lumens ensure that a picture width of 813 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 542 cm. The model is also compatible with Full HD 1080P and 4K as well as 3D, meaning that all Blu-ray formats currently available can be recognized by the projector. It was launched in 2012 and is no longer offered by the manufacturer Sony, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type

3 x 1,48 SXR D Panel

UHD 19/10 Silicon X-tal Reflective Display (SXR D)

Ansi-Lumen

15000 / 11000 bei 330W Lampe

7111 Lux (bei 200 cm Screen)

Contrast

8000:1 full on/off

8000:1 full on/off

Black Level

1,8750 min. Lumen

0,889 min. Lumen

Lens shift

Vert.: +/-35% Hori.: +/-7%

Resolution

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

6 x 450 oder 330W Lampe

Article Nr.: LKRM-U330S / LKRM-

U450S

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

47,83% / 0,77 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

2 x HDMI in

1 x CRU Data Port Slot


1 x RS232C

Ceiling Mounting


No, is not possible.

Power

4300W

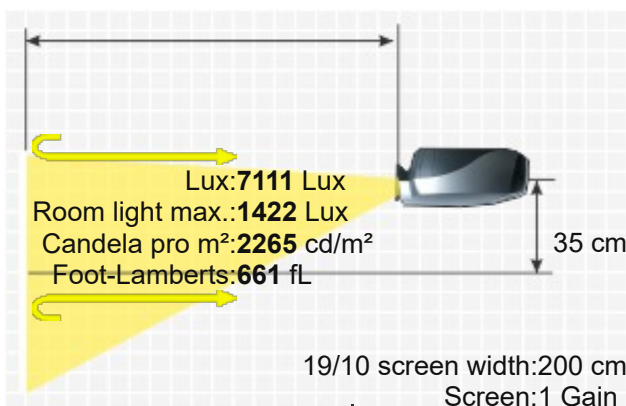

Size WxHxD	546 x 570 x 1015 mm (21,5"x22,4"x40") 315,89 L/dm³
Operating Noise	-
Weight	145,00 kg / 319,67 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	661 fL / max. 813 cm screen width 2265 cd/m²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Eco Mode
	■ 4 TByte memory
Screen Mirroring	■ The SRX-R515DS combines two Sony SRX-R515 projectors for a total output of 30,000 lumens.
	■ see attached PDF
Screen Mirroring	-

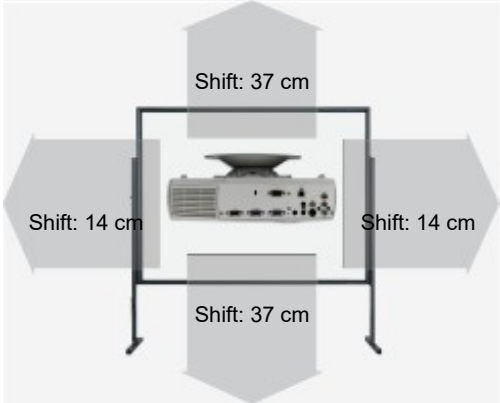

Optional accessories


	(330W) Sechserpack Lampe Original	LKRM-U331	1.530,73 €
	(450w) Sechserpack Lampe Original	LKRM-U450	1.866,38 €
	(450w) Einzellampe Original	LKRM-U450S	EOL €
	(330W) Lampe Original	LKRM-U331S	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LKRL-Z519	1.9-4:1	3.8-8 m	+/-35%	+/-7%	Powered
LKRL-Z514	1.35-2.34:1	2.7-4.7 m	+/-35%	+/-7%	Powered
LKRL-Z511	1.05-1.75:1	2.1-3.5 m	+/-35%	+/-7%	Powered

Status 2012 Discontinued (EOL) // Last update of the data: 2025-03-03

Data

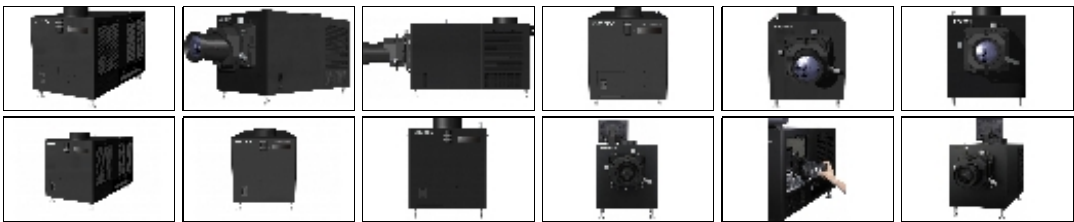

More Details



HCinema

<https://www.projector-database.com/pro/sonysrxr515-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.