

Sony SRX S110

SONY SRX S110



The SRX S110 SXR D has 10000 Ansi lumens, a contrast of 1800:1 and a UHD (4K+2K) 4096 x 2160 resolution. The manufacturer Sony specifies a service life of 800 hours, which is over 1.1 years if enjoyed for two hours a day. The integrated lens shift gives freedom when positioning the projector. The projector can illuminate an image width of up to 813 cm thanks to its 10000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 542 cm is recommended. Video signals 1080P and 4K are also no problem for the projector. It was launched in 2006 and is no longer offered by the manufacturer Sony, but is still very popular in our projector database. It should also be noted that, unfortunately, there are no longer any replacement lamps for the projector, neither original nor replica.

Brief Introduction

Beta 2.5

Display Type

3 x 1,55" SXR D Panel
UHD 19/10 Silicon X-tal Reflective Display (SXR D)

Ansi-Lumen

10000

4741 Lux (bei 200 cm Screen)

Contrast

1800:1 full on/off

1800:1 full on/off

Black Level

5,5556 min. Lumen

2,637 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

UHD (4K+2K) 4096 x 2160
8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 2000W Xenon Lamp
Article Nr.: LKRX-B110 / LKRX-110

Light Life

800 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections


DVI-Input Card (LKRI-004)
5 x BNC RGBHV in
RJ45
RS232C Din 9pin in
weitere optional

Ceiling Mounting


Yes, is possible.

Power

5400W

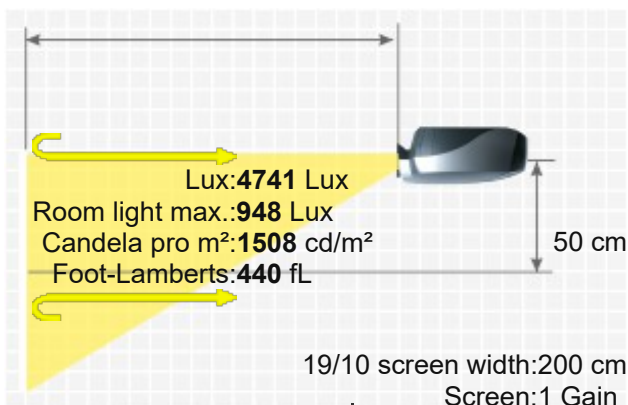

Size WxHxD	740 x 500 x 1330 mm (29,1"x19,7"x52,4") 492,1 L/dm³
Operating Noise	65dB
Weight	110,00 kg / 242,51 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	440 fL / max. 813 cm screen width 1508 cd/m²
Features	Full HD 1080P compatible Lens shift Funktion Gamma correction 24/7 continuous operation capable Lan network compatible.
Screen Mirroring	-

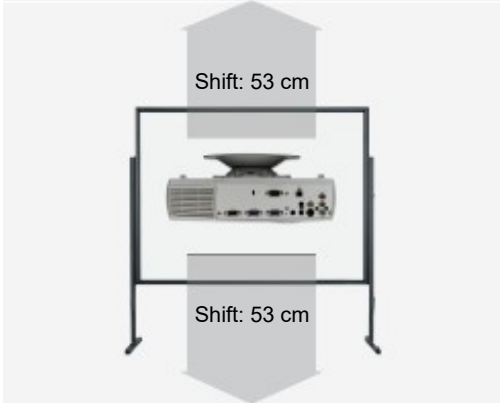

Optional accessories

	Nackte Lampe Original	LKRX-110	EOL €
	Lampe Original	LKRX-B110	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LKRL-Z140	3.86-7.06:1	7.7-14.1 m	+/-50%		Powered
LKRL-Z125	2.36-3.88:1	4.7-7.8 m	+/-50%		Powered
LKRL-Z122	2.23-3.92:1	4.5-7.8 m	+/-50%		Powered
LKRL-Z120	1.71-2.25:1	3.4-4.5 m	+/-50%		Powered
LKRL-Z117	1.73-2.41:1	3.5-4.8 m	+/-50%		Powered
LKRL-Z115	1.46-1.72:1	2.9-3.4 m	+/-50%		Powered

Fix Optional Lenses

LKRL-90	0.86:1	1.7 m	+/-15%		No Zoom
Status	2006 Discontinued (EOL) // Last update of the data: 2025-03-03				

Data



More Details



HCinema

<https://www.projector-database.com/pro/sonysrxs110-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.