

Sony VPL FX40/L

SONY VPL FX40/L



A brief introduction to the VPL FX40/L: The Sony stationary LCD projector offers 4000 Ansi lumens, a contrast of 700:1 and an XGA 1024 x 768 resolution. The integrated lens shift provides freedom when positioning the projector. Thanks to the brightness of 4000 Ansi lumens, an image width of 551 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 367 cm). Playing 1080P is also no problem for the projector. It was launched in 2007 and is no longer offered by the manufacturer Sony, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type

3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

4000 (lamp mode: High) / 3200 (lamp mode: Standard)

Contrast

700:1 full on/off

Black Level

5,7143 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10% motorisch

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275W Lamp

Articel Nr.: LMP-F270

Light Life

2500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,3

Objective

F=1,66-2,18 f=30,6-39,7 mm

Throw Ratio

1,875-2,381:1

Audio

2 x 1,8W

Connections

HDMI in

2 x D-sub 15pin in 1 x out

5 x BNC RGBHV in

S-Video in

Cinch Video in


Mini Jack in

Screen

1333 Lux (bei 200 cm Screen)

700:1 full on/off

1,912 min. Lumen

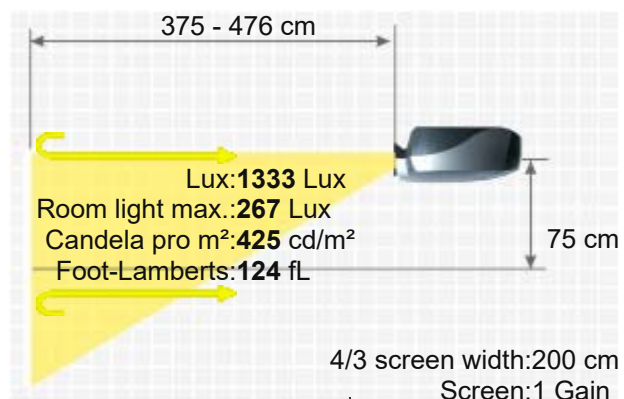

RJ45 in
RS232C Din 9pin in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
400W
532 x 145 x 352 mm (20,9"x5,7"x13,9") 27,15 L/dm³
35 / 28 dB in Eco Mode

Weight
Keystone
Illumination

9,80 kg / 21,61 lbs.
Vert.: +/-30°
-

Frequenz


H-sync: 19-92 kHz
V-sync: 48-92 Hz

Foot-Lamberts

124 fL / max. 551 cm screen width
425 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Control via web browser
- Lan network compatible.
- De-interlacer with 3:2 2:2 pull down.

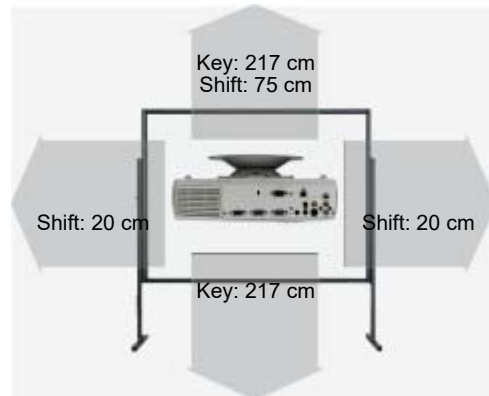

Optional

Bulb only	NLMP16581
Lamp ruby	Ruby-LMP16581
Lamp original	LMP-F270
Compatible lamp	LMP-K16580
Object lens original	VPLL-1008
Remote control original	148010412 / RM-PJ18
Air filter right original	X21499421
Air filter left original	X21499431
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16581>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VPLL-Z1032	3.24-4.95:1	6.5-9.9 m	50%	+/-10%	Powered
VPLL-Z1024	2.38-3.26:1	4.8-6.5 m	50%	+/-10%	Powered
Fix Optional Lenses					
VPLL-1008	0.78:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2007 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/sonyvplfx40-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.