

# SVIC S620

SVIC S620



## Brief Introduction

Beta 2.5

With the S620, manufacturer SVIC offers a standard portable LCD projector with WVGA 800 x 480 resolution and a contrast of 500:1. The manufacturer specifies a lamp life of 6000 hours, which converts to over 8.2 years at 2 hours per day. As SVIC specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. 120 Ansi lumens ensure that a picture width of 111 cm is also possible. However, if room light is available, the picture should be max. 74 cm wide. With only 28 decibels of operating noise, the model is already very quiet compared to others. It is no longer offered by the manufacturer SVIC.

## Display Type

- LCD TFT Panel
- WVGA 16/9 Liquid Crystal Display

## Ansi-Lumen

120 2000 Lumen

53 Lux (bei 200 cm Screen)

## Contrast

500:1 full on/off

500:1 full on/off

## Black Level

0,2400 min. Lumen

0,106 min. Lumen

## Offset

-

## Resolution

WVGA 800 x 480  
384.000 Pixel

## Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.  
Very narrow picture width and rooms with very little light.

## Light Source

-

## Light Life

6000 h.

## Operating Costs

-

## Focus

-

## Zoom

-

## Objective

-

## Throw Ratio

-

## Audio

2 x 2W

## Connections

D-sub 15 pin in  
YUV in  
S-Video in  
Cinch Video in  
Antenne in

## Ceiling Mounting

-

## Power


-

## Size WxHxD

-

## Operating Noise

28dB

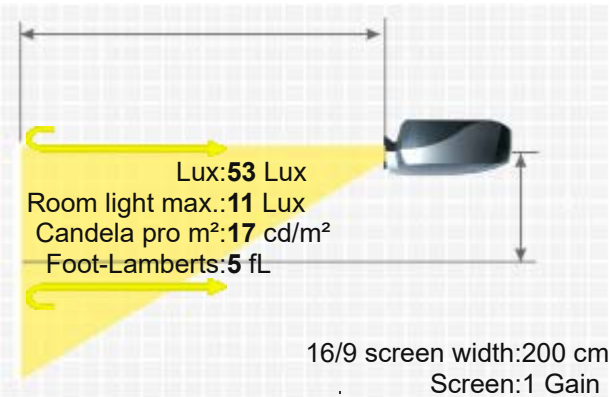

Weight	-
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	5 fL / max. 111 cm screen width 17 cd/m²
Features	■ Password protection ■ PAL/SECAM Tuner
Status	- Discontinued (EOL) // Last update of the data: 2024-06-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/svics620-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.